
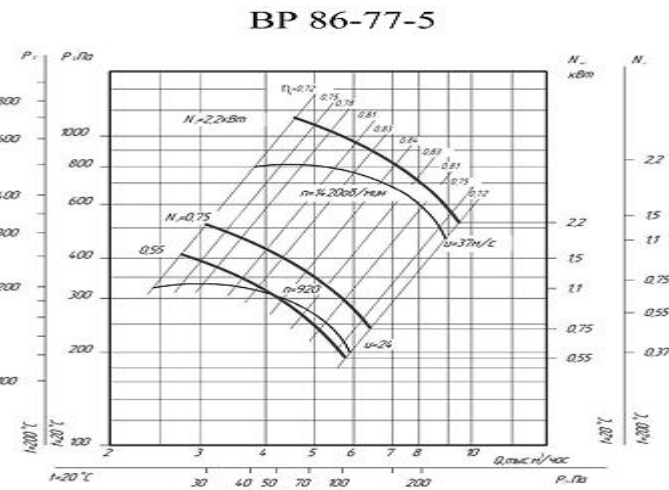
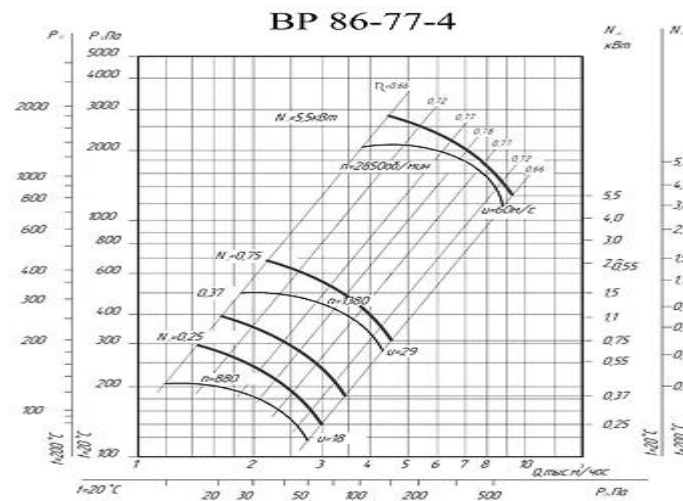
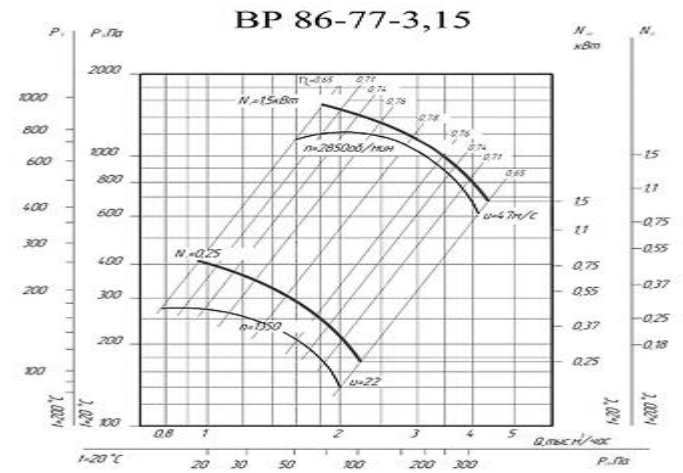






Технические характеристики

Типоразмер вентилятора	Двигатель		Частота вращения рабочего колеса, об/мин	Параметры в рабочей зоне		Масса вентилятора, кг	Виброизоляторы	
	Типоразмер	Мощность, кВт		Производительность, тыс. м³/час	Полное давление, Па		Тип	Кол-во
ВР 86-77-2,5	АИР56А4	0,12	1350	0,45÷0,85	170÷110	20,7	ДО38	4
	АИР63В4	0,37	1370	0,55÷0,90	190÷120	21,2		
	АИР63В2	0,55	2850	0,85÷1,75	720÷450	22,2		
ВР 86-77-3,15	АИР63А4	0,25	1350	0,85÷1,84	280÷170	30,8	ДО38	4
	АИР80А2	1,5	2750	1,8÷4,0	1220÷680	38,9		
ВР 86-77-4	АИР63В6	0,25	880	1,4÷2,7	210÷120	46,2	ДО38	4
	АИР71А4	0,55	1350	2,1÷4,0	480÷250	47,5	ДО38	
	АИР71В4	0,75	1380	2,2÷4,1	500÷300	51,5	ДО38	
	АИР100L2	5,5	2850	4,3÷8,3	2200÷1250	72,2	ДО39	
ВР 86-77-5	АИР71В6	0,55	920	2,75÷4,1	340÷315	92	ДО39	5
	АИР80А6	0,75	920	2,75÷5,6	340÷215	95		
	АИР90L4	2,2	1420	4,3÷8,6	810÷500	107		
ВР 86-77-6,3	АИР100L6	2,2	935	5,6÷11,3	560÷350	162	ДО40	5
	АИР112М4	5,5	1435	8,6÷12,0	1320÷1250	179		
	АИР132S4	7,5	1435	8,6÷17,5	1320÷800	200		
ВР 86-77-8	АИР132S6	5,5	960	12,0÷17,0	950÷880	277	ДО41	6
	АИР132М6	7,5	960	12,0÷23,0	950÷580	293		
ВР 86-77-10	АИР160S8	7,5	730	15,0÷28,0	820÷660	600	ДО43	5
	АИР160М8	11,0	730	15,0÷30,5	820÷610	620		
	АИР180М6	18,5	980	20,5÷39,0	1480÷1200	680		
	АИР200М6	22,0	980	20,5÷41,0	1480÷1120	720		
ВР 86-77-12,5	АИР200М8	18,5	730	29,5÷35,5	1280÷1320	910	ДО43	6
	АИР200L8	22,0	730	29,5÷50,0	1280÷1200	950		
	АИР225М8	30,0	730	29,5÷60,0	1280÷960	1100		


эродинамические характеристики

(для асинхронной частоты передачи)

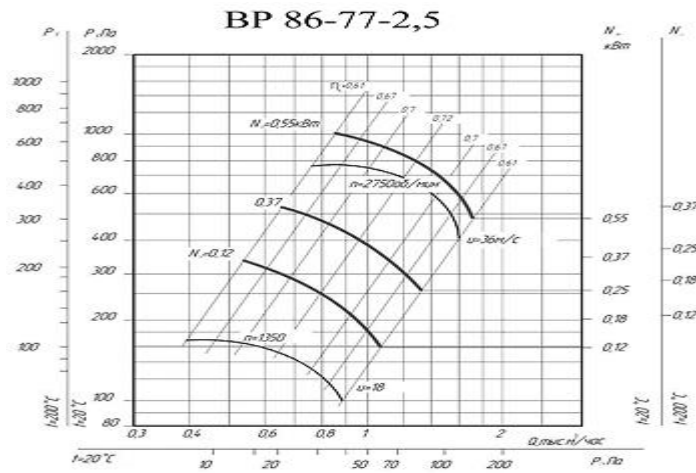

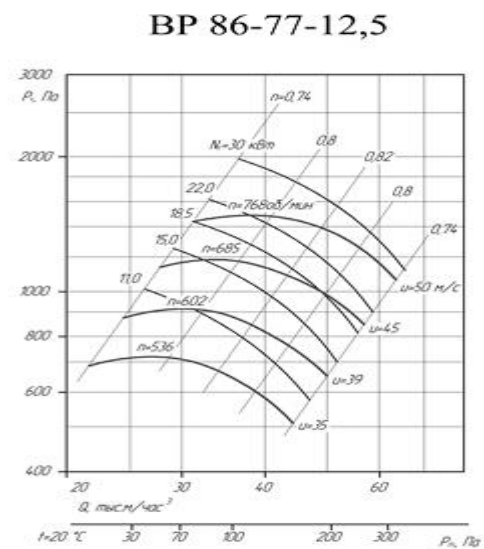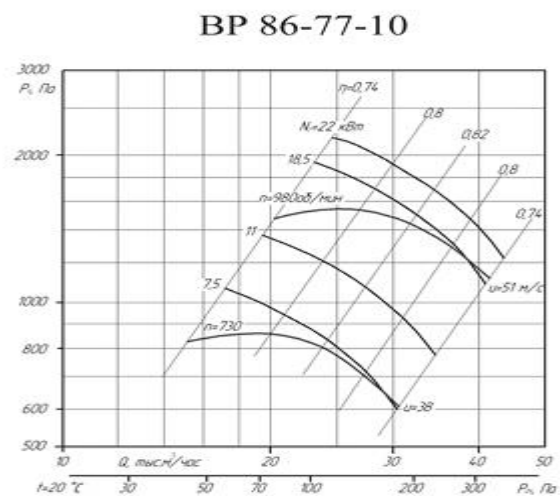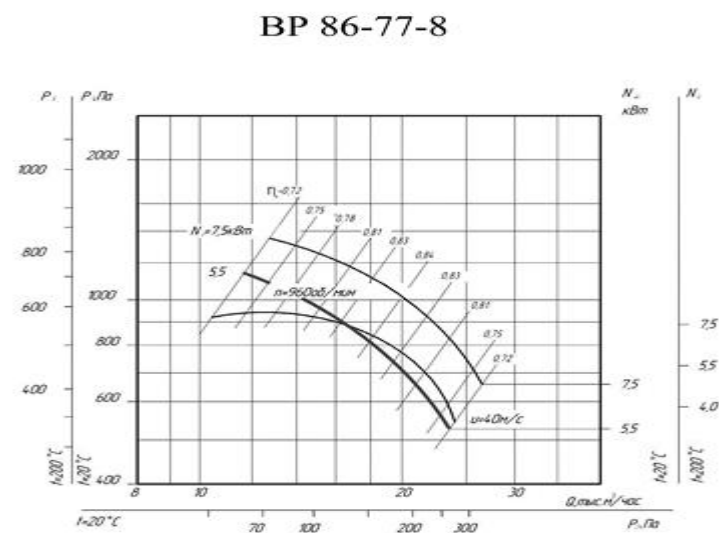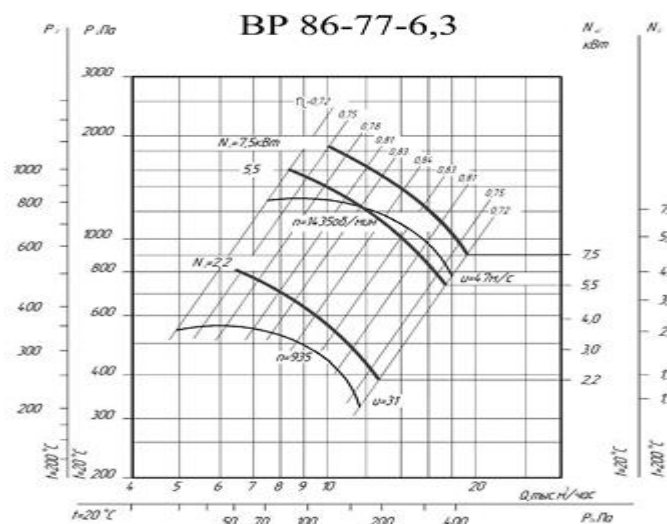

Габаритные размеры

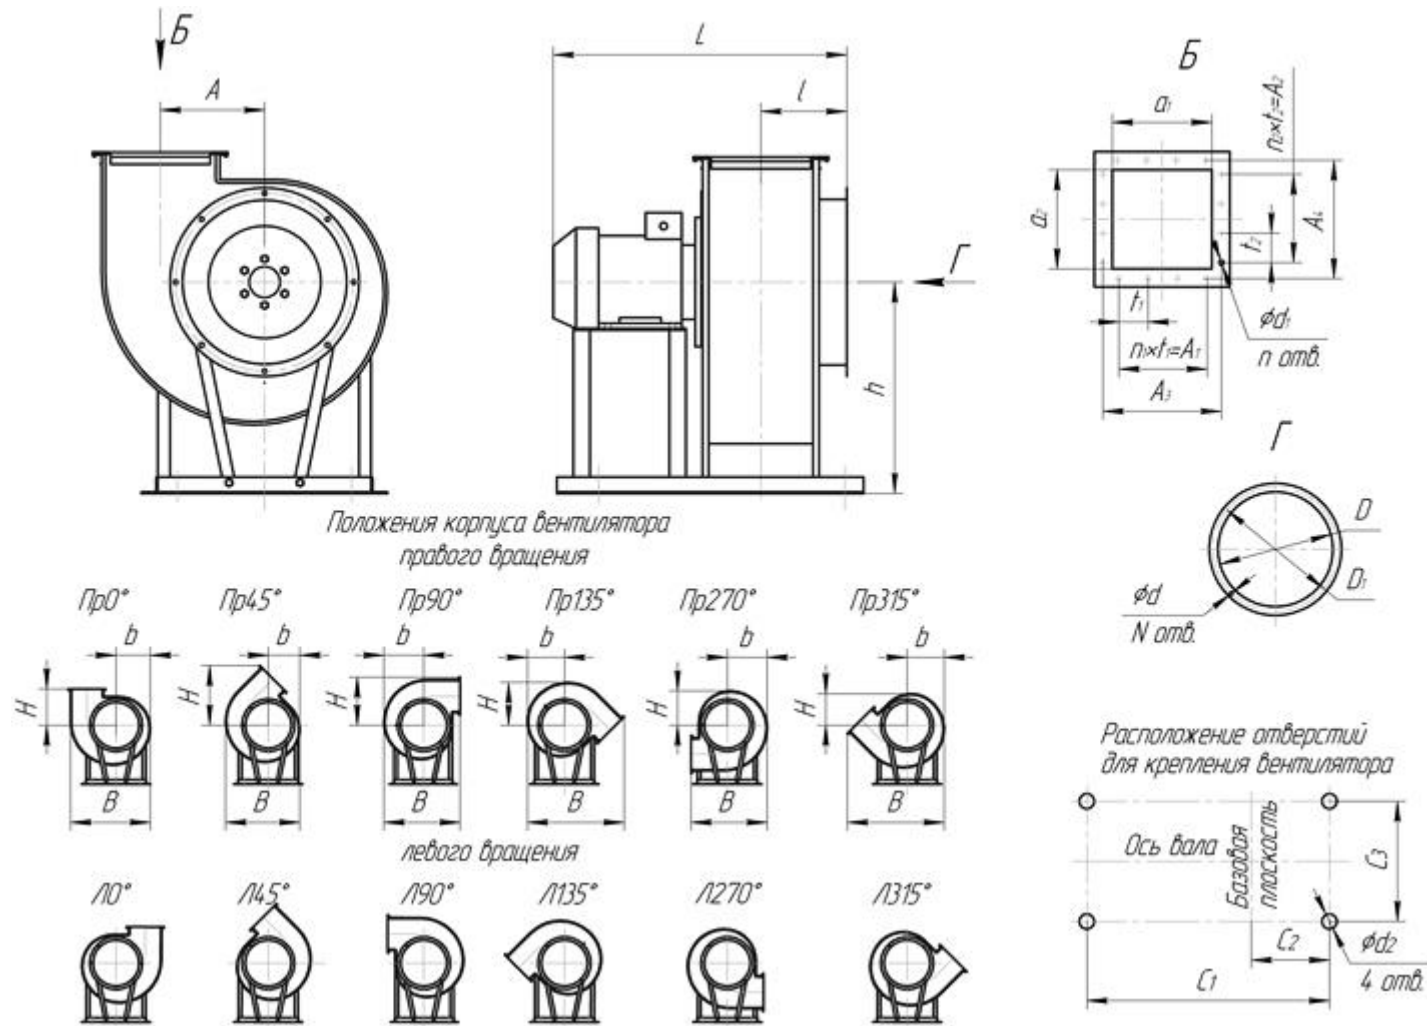

Разм, мм №	h	l	L _{max}	A	D	D ₁	a ₁	a ₂	A ₁	A ₂	A ₃	A ₄	t ₁	t ₂	C ₁	C ₂	C ₃	N	n	n ₁	n ₂	d	d ₁	d ₂
2,5	320	153	493	167	260	280	175	175	206	206	206	206	103	103	470	137	250	8	8	2	2	8,5	8	12
3,15	410	175	552	212	325	345	225	225	255	255	255	255	85	85	525	170	325	8	12	3	3	8,5	8	12
4	520	202	695	262	410	430	280	280	309	309	309	309	103	103	610	200	400	8	12	3	3	8,5	8	12
5	650	232	740	324	510	530	355	355	381	381	381	381	127	127	770	245	410	8	12	3	3	8,5	8	15
6,3	745	280	1000	413	640	660	445	445	471	471	471	471	157	157	880	308	503	16	12	3	3	8,5	8	15
8	790	340	1170	518	826	850	565	565	450	450	600	600	150	150	1120	363	663	16	16	4	4	8,5	8	15
10	1212	430	1504	630	1010	1040	700	700	750	750	750	750	150	150	1244	327	840	16	20	5	5	10	12	15
12,5	1350	542	1684	813	1270	1310	875	875	750	750	750	750	150	150	1350	268	1260	24	24	5	5	12	12	15

Разм., мм №	Пр0°, Л0°			Пр45°, Л45°			Пр90°, Л90°			Пр135°, Л135°			Пр270°, Л270°			Пр315°, Л315°		
	B	b	H	B	b	H	B	b	H	B	b	H	B	b	H	B	b	H
2,5	465	189	198	408	173	335	417	220	276	535	204	235	417	219	189	539	204	173
3,15	580	238	239	515	218	413	516	277	342	670	258	297	516	277	238	670	258	218
4	728	301	291	648	273	500	642	351	428	856	322	376	642	351	301	856	322	273
5	915	389	340	940	357	612	790	454	526	1032	420	482	790	454	389	1032	420	357
6,3	1143	487	420	1052	447	760	985	564	656	1286	526	605	985	564	487	1286	526	447
8	1450	614	533	1328	564	965	1247	714	836	1629	664	764	1247	714	614	1629	664	564
10	1800	750	646	1642	695	1191	1528	888	1044	2012	820	951	1528	888	750	2012	820	695
12,5	2246	805	800	2060	880	1490	1908	1107	1294	2520	1030	1180	1908	1107	805	2520	1030	880