

SPECIFICATIONS

ROOTS

Blowers Compressors Exhausters

ROOTS™ RAM™-DPJ WHISPAIR™ High-Pressure Rotary Positive Blowers

Frames 406 DPJ

RAM™ stands for Reliability, Availability and Maintainability. Today, more than ever, ROOTS is committed to supplying our customers with reliable products manufactured with state-of-the-art CNC machine tools. Production and inventory are being scheduled and controlled to ensure these units will be available when you need them. Design improvements such as repositionable rugged steel mounting feet and die-cast aluminum drive end covers and gear covers help to reduce installation costs and make normal maintenance easier.

BASIC GAS BLOWER DESCRIPTION

The ROOTS™ RAM™-DPJ WHISPAIR™ rotary blower has an exclusive discharge jet plenum design which allows cool, pressurized system air to flow into the cylinder. This unique design permits operation at high pressure levels with a single stage unit.

The RAM high pressure blower is designed for continuous operation at discharge pressures up to 30 psig. It has no valves, vanes or Teflon rings. Clean, dry discharge air or gas provides usable heat for your process.

The basic model is designed using integral-shaft ductile iron impellers with an involute profile. The casing and headplates are grey iron, while the drive and cover and gear cover are die cast aluminum. Carburized and ground alloy steel spur timing gears are taper mounted on the shafts, secured with a locknut. Cylindrical roller bearing are splash lubricated at both the gear end and drive end.

Piston rings reduce air leakage through the headplate bores and lip-type oil seals prevent lubricants from entering the air chamber. Mechanical seals are available upon request.

WARRANTY PERIOD


Twelve (12) months from date of original unit start-up or 18 months from date of original shipment, whichever occurs first.



DESIGN AND CONSTRUCTION FEATURES

1. Single stage operation to 30 psig
2. No valves, vanes or Teflon rings to wear
3. Alloy steel timing gears
4. Cylindrical roller bearings
5. Piston ring air seals
6. Lip-type oil seals, (optional mechanical seal)
7. Splash oil lubrication
8. Horizontal and vertical configurations available

OPERATING PRINCIPLE

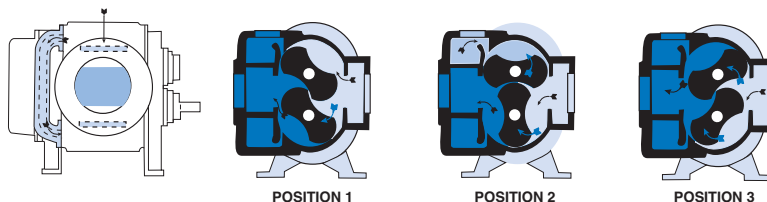


Position 1: Incoming air is trapped between the impellers. Simultaneously, pressurized air is being discharged. Position 2: As the upper impeller passes the jet plenum, cooled, pressurized air flows into the space between the impeller and cylinder. This cools the trapped air, helps control thermal growth and allows higher discharge pressures. Position 3: The trapped air is then moved into the discharge flange (left). Backflow is reduced, resulting in lower operating noise level and reduced shock loading on the impellers.



PERFORMANCE TABLE




FRAME SIZE	SPEED RPM	15" PSI CFM BHP	20" PSI CFM BHP	25" PSI CFM BHP	30" PSI CFM BHP
406 DPJ	4000	518 47	494 62	474 76	455 91
	3070	362 35	339 46	319 57	300 69
	2320	237 26	214 35	193 43	195 51
	1750	142 19	119 26	98 32	80 39

Ratings based on inlet air at standard pressure of 14.7 psia, standard temperature of 68°F, and specific gravity of 1.0


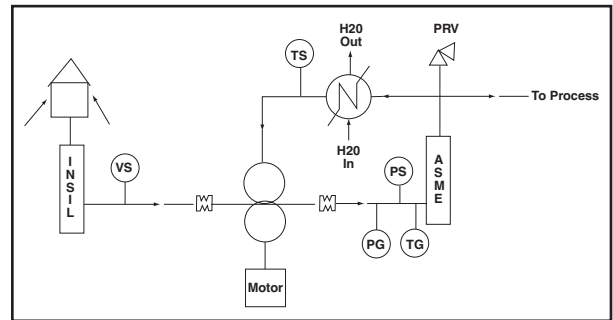


OUTLINE DRAWING & DIMENSIONAL TABLE

VERTICAL CONFIGURATION

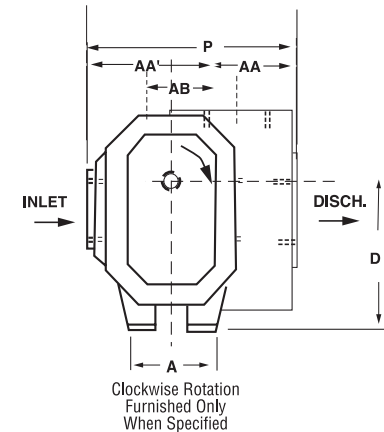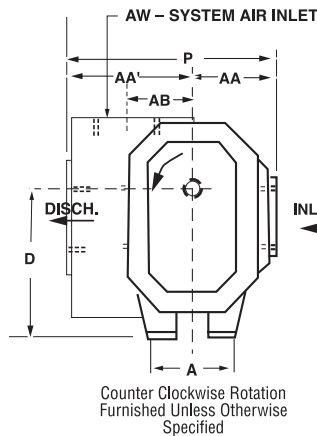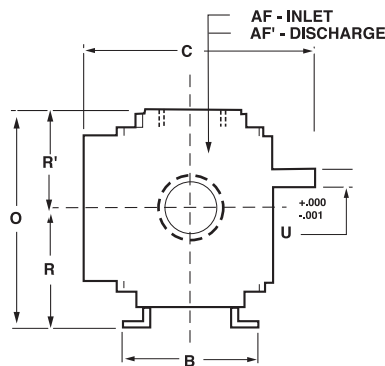

HORIZONTAL CONFIGURATION

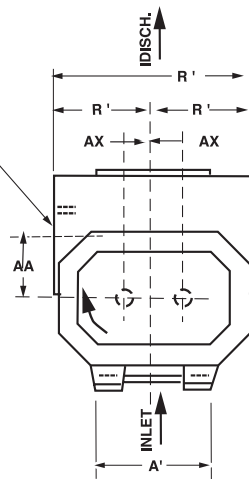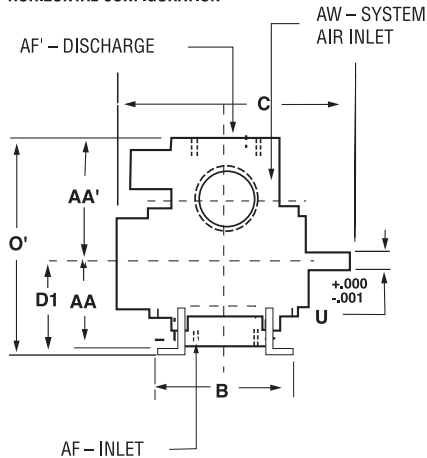

Horizontal Orientation
Top Discharge Only

FRAME SIZE	A	A'	B	C	Drive Shaft Location		O	O'	P	P'	R	U	Keyway	AA	AA'	AB	AF	AF'	AW	AX	WGT.
					D	D1															
406 DPJ	8.00	11.00	10.75	20.50	11.25	7.50	16.38	18.00	17.75	14.75	9.00	1.500	.375 x .188	7.25	15.25	10.50	4 NPT	5 NPT	4 NPT	2.25	365

NOTES:

1. All dimensions are in inches. 2. Weights are in pounds, and are approximate.



**Dresser Roots
Headquarters**
16240 Port Northwest Drive
Houston, TX 77041
Toll Free (US): 1-877-363-7668
Ph: 832-590-2305
Toll Free (US) Fax: 1-877-357-7238
Fx: 832-590-2326

**Dresser Roots
Connersville Operation**
900 West Mount Street
Connersville, IN 47331
Ph: 765-827-9200
Fx: 765-827-9266

**Dresser Roots
Holmes Operation**
PO Box B7
Off St. Andrews Rd
Turnbridge, Huddersfield
England HD1 6RB
Ph: +44 (0) 1484 422 222
Fx: +44 (0) 1484 422 668

website: www.rootsblower.com • US email: roots@dresser.com • UK email: dmd_roots@dresser.co.uk

S-16K97
April 2006

©2006 Dresser, Inc. all rights reserved. • Printed in the U.S.A. • All information subject to change without notice. ROOTS-FLO and Universal RAI are registered trademarks of Dresser, Inc. • EasyAir, TRI-NADO, The Original ROOTS Blower, Universal RAI-J, Universal RAI-G, RAM, WHISPAIR, XLP Prime and XLP are trademarks of Dresser, Inc.