

PowerGuide

High Performance Drying Tunnel


SECOMAK

Experts In Drying Solutions

E: sales@secomak.com



PRODUCT CONFIGURATIONS

PRODUCT SIZE (mm)			
BOTTLES		CANS	
			

MTBF:
6,253 HOURS

MTTR:
1 HOUR

MACHINE
EFFICIENCY
99.9 %

NOISE:
≤ 83 dB (A)

POWERGUIDE STANDARD CONFIGURATIONS

Beverage Can	Glass Bottle	PET Bottle
Date coding	Date coding	Date coding
Drying can tops	Labelling	Labelling
Drying for final pack	Cap inspection	Cap inspection
Drying for can labels	Shrink sleeve application	Shrink sleeve application
Shrink sleeve application	Returnable inspection	Camera orientation
	Full bottle inspection	

For further information please contact Secomak on +44 (0) 2087 321 300 or sales@secomak.com

www.secomak.com

Secomak Ltd.

330 Centennial Park, Elstree, Hertfordshire, WD6 3TJ, UK.

PowerGuide

High Performance Drying Tunnel

SECOMAK

Experts In Drying Solutions

E: sales@secomak.com

TECHNICAL DATA

POWER : 15KW

360-440V/50HZ 432-528V/60HZ 3 PHASE




ENERGY CONSUMPTION AT 50HZ: 11KW

CURRENT PROTECTION: 63A (BACK UP)

NOMINAL CURRENT : 24A

NOMINAL POWER CONSUMPTION : 17.2kVA

POWER FACTOR (COS ϕ) : 0.90

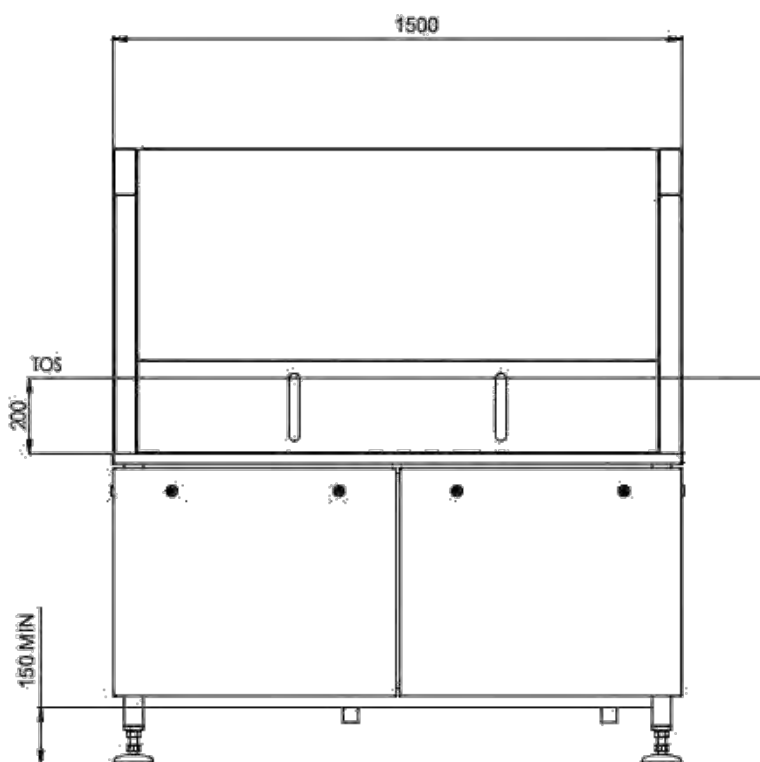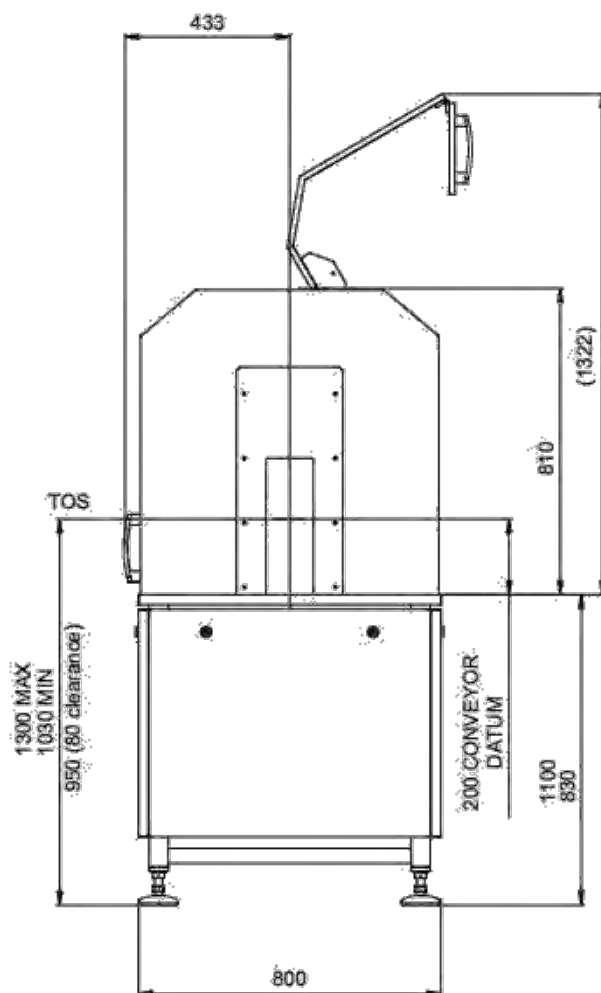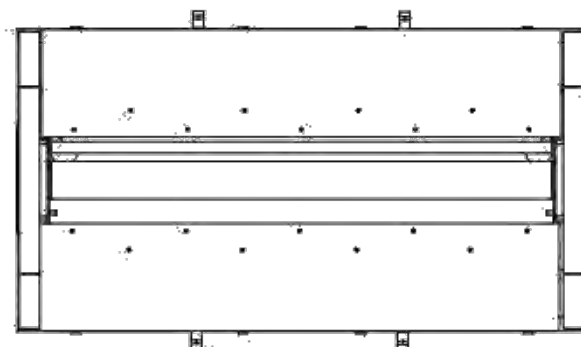

For further information please contact Secomak on +44 (0) 2087 321 300 or sales@secomak.com

www.secomak.com

Secomak Ltd.

330 Centennial Park, Elstree, Hertfordshire, WD6 3TJ, UK.