

16,9%



NATURAL
REFRIGERANT
R290

Key Features


The IM-130ANE-HC and IM-130ANE-HC-23 are modular cube ice makers, which utilise Natural Refrigerant R290.




Energy efficient, with savings of (IM-130ANE-HC-23) 16,9% compared to HFC equivalent model.*

- ✓ Members of the Emerald Class, Hoshizaki's new range of climate friendly ice makers.
- ✓ Can produce up to 125 kg of cube ice per 24 hours respectively (AT.10°C.WT.10°C).
- ✓ Unique ice making system that has an automatic rinse cycle. After every new batch of ice, the water reservoir drains and refills with fresh water. System comes with a magnetic water pump that has no direct coupling, which prevents any leakage.
- ✓ Closed water circuit offers the ultimate contamination protection, by reducing the number of points at which impurities can enter the ice making process.
- ✓ Electronically controlled to ensure an optimised ice making process under varying circumstances without the need for physical adjustments. Quality of ice is always consistent.
- ✓ Easily cleanable air filter allows end-users to carry out routine cleaning schedules. Extends product life expectancy and reduces the frequency and costs of maintenance call-outs.
- ✓ Stainless steel exterior with integrated door handles provides a hygienic and high quality finish.

* Based on Internal comparative study. Please contact your local sales branch to find out more.



IM-130ANE-HC
Ice: Cube (L)
Size: Approx. 28 x 28 x 32mm



IM-130ANE-HC-23
Ice: Cube (M)
Size: Approx. 28 x 28 x 23mm



Available Models

Model	Air Cooled	Water Cooled
IM-130ANE-HC	✓	
IM-130ANE-HC-23	✓	

Bins

Model	Type of Bin	Max. Bin Capacity approx.
B-301SA	Modular	144kg
B-501SA, Top Kit - TK 8 D		217kg
B-801SA, Top Kit - TK 8 D + TK 18 D		348kg

Production


Model	Ice Production per 24h approx.	Temperature	Ice Production per Cycle approx.	Water Consumption per 24h approx.
IM-130ANE-HC	125kg	AT.10°C, WT.10°C	1.8kg / 80 pcs	0,52m ³
	110kg	AT.21°C, WT.15°C		0,23m ³
	95kg	AT.32°C, WT.21°C		0,20m ³
IM-130ANE-HC-23	100kg	AT.10°C, WT.10°C	1.3kg / 80 pcs	0,66m ³
	95kg	AT.21°C, WT.15°C		0,30m ³
	83kg	AT.32°C, WT.21°C		0,24m ³

For more information visit our website at www.hoshizaki-europe.com

Hoshizaki Europe B.V. retains the right to change products and their specifications without prior notice.



➔ CAD drawings available on our website

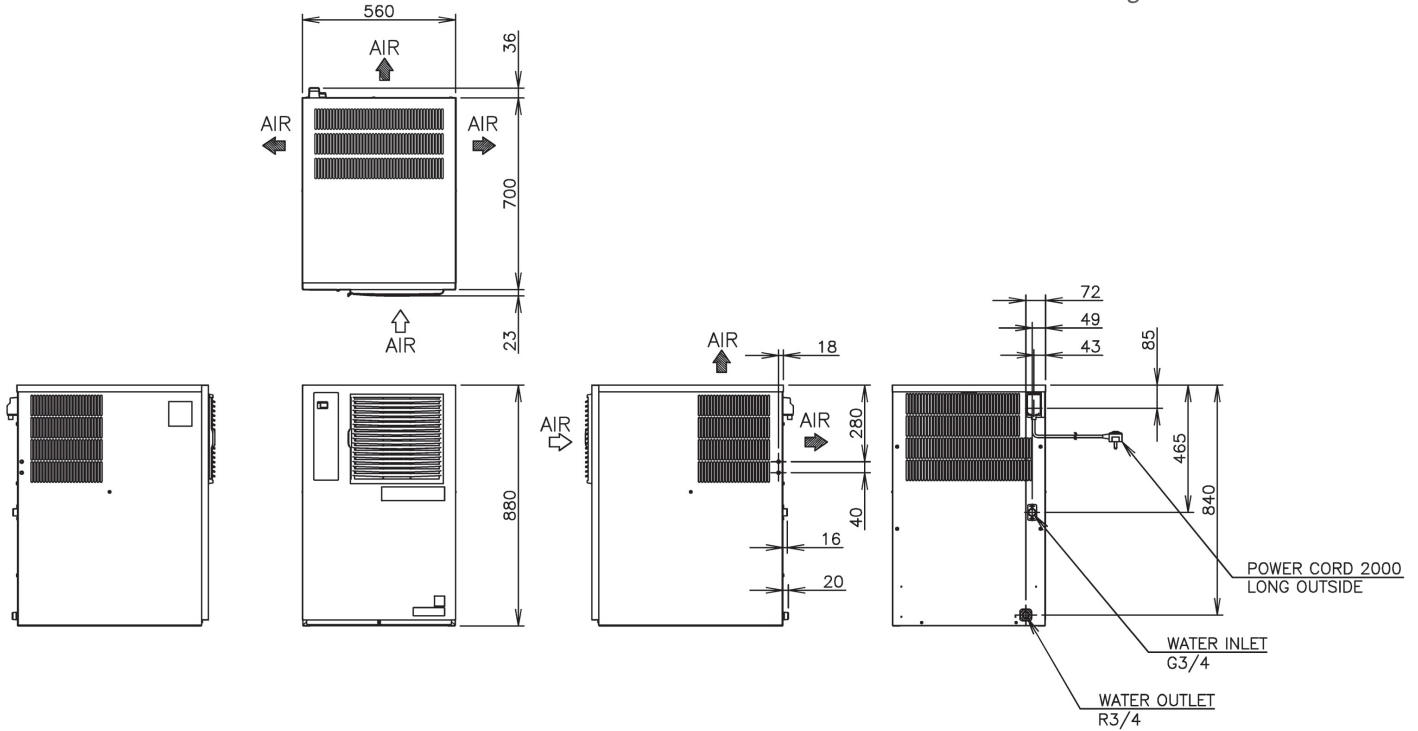

Specifications

	IM-130ANE-HC	IM-130ANE-HC-23
Dimensions W x D x H (mm)	560 x 700 x 880	560 x 700 x 880
AC Supply Voltage	1/220-240V 50Hz	1/220-240V 50Hz
Electric Consumption (AT.32°C, WT.21°C)	635W	635W
Heat Rejection (AT.32°C, WT.21°C)	1310W	1310W
Refrigerant Charge	R290/110g	R290/110g
Isolation	Polyurethane	Polyurethane
Weight Gross / Net	79kg / 68kg	79kg / 68kg

Operation Requirements

Ambient Temperature	1 - 40°C
Water Supply Temperature	5 - 35°C
Water Supply Pressure	0,7 - 7,8 bar (0,07 - 0,78MPa)
Voltage Range	Rated Voltage ± 6%

Accessories

Ice chute
Scoop
Installation Kit