



HOSHIZAKI

IM-65NE-Q BALL ICE MAKER

Product Description

The IM-65NE-Q is a self-contained under counter ice maker producing clean, pure and perfectly round Ball Ice. It is suitable for placement in bars. Produces up to 26 kg per 24 hours and has a storage capacity of 17kg.



- A closed water circuit offers the ultimate contamination protection, by reducing the number of points at which impurities can enter the ice making process.
- Hoshizaki ice makers are micro computer controlled, controlling the ice making process to perform at its best under varying circumstances, without having to make physical adjustments.
- A stainless steel exterior provides a hygienic and high quality finish.
- Foam injected polyurethane for insulation (HFC free), helps preserve the quality and consistency of the ice produced, reducing the number of production cycles.
- An easily cleanable air filter allows end users to carry out a routine cleaning schedule, extending product life expectancy and reducing the frequency and costs of maintenance call-outs.
- Ball Ice is unique. By using Hoshizaki ice balls ordinary drinks can be turned into spectacular beverages.

Available Models

IM-65NE-Q (Air cooled)

Ice

Model	Shape
IM-65NE-Q	Ball Approx. Ø 45mm



Ball

Bins

Model	Type of Bin	Max. Bin Capacity
IM-65NE-Q	Self contained	Approx. 17kg

Production

Model	Ice Production per 24h	Temperature	Ice Production per Cycle	Water Consumption per 24h
IM-65NE-Q	Approx. 26kg (6mm) Approx. 24kg (6mm) Approx. 20kg (6mm)	AT.10°C, WT.10°C AT.21°C, WT.15°C AT.32°C, WT.21°C	Approx. 0,67kg / 15. pcs	Approx. 0,97m³ Approx. 0,72m³ Approx. 0,45m³

Two year warranty

For more information visit our website at www.hoshizaki-europe.com
Hoshizaki Europe B.V. retains the right to change products and their specifications without prior notice.






HOSHIZAKI

IM-65NE-Q BALL ICE MAKER

IM-65NE-Q

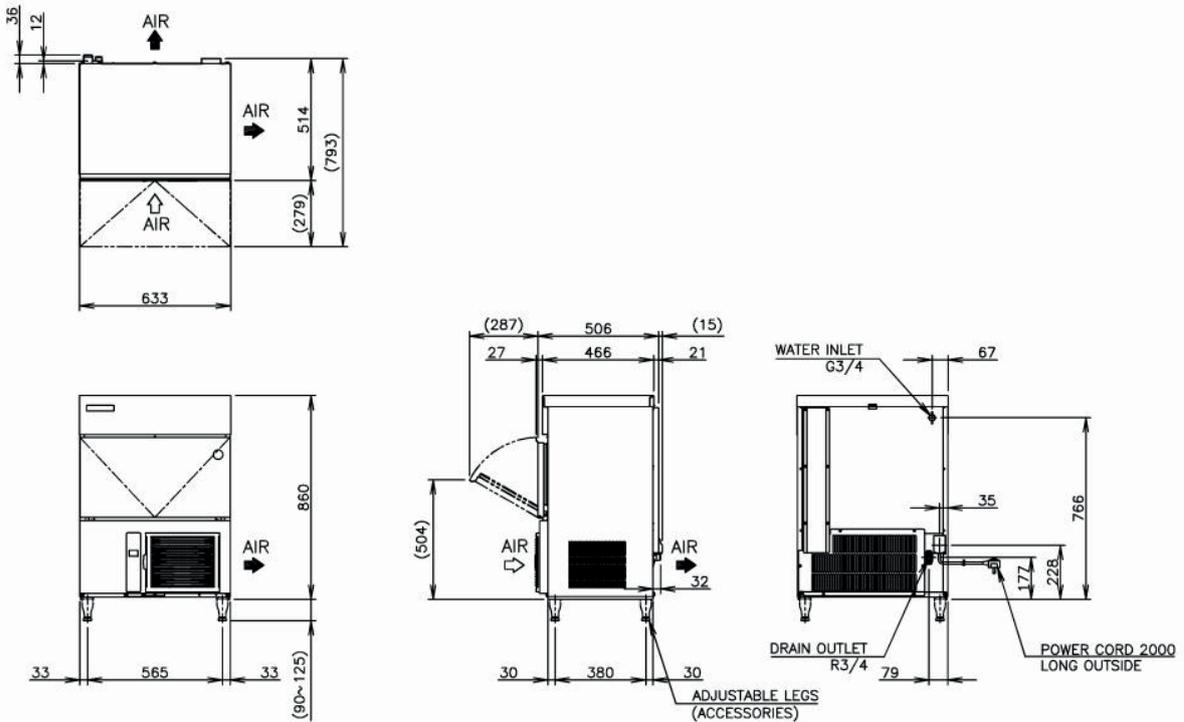

Specification	IM-65NE-Q
Ac Supply Voltage	1 PHASE 220-240V 50Hz
Amperage (AT.32°C, WT.21°C)	2.9A
Starting Amperage	17A
Electric Consumption (AT.32°C, WT.21°C)	390W
Freeze Cycle Time (AT.21°C, WT.15°C)	Approx. 33 min.
Exterior	Stainless Steel, Galvanized Steel (Rear)
Insulation Foam Blowing Agent	-
Connections - Electric	X-Type Con.
Connections - Water Supply	Inlet G3/4 (connected at rear side)
Connections - Drain	Outlet R3/4 (connected at rear side)
Ice Making System	Cell type
Harvesting System	Hot Gas Defrost
Condenser	Air-cooled, Fin and Tube type
Heat Rejection (AT.32°C, WT.21°C)	800W (690kcal/h)
Evaporator	Tin-plated Copper on Sheet and Cells
Refrigerant Control	Capillary Tube
Refrigerant Charge	R134a 200g
Bin Control System	Microswitch with Time Delay Board
Ice Making Control System	Thermistor, Timer
Electrical Protection	Class I Appliance, 5A Fuse
Compressor Protection	Auto-reset Overload Protector
Ice Maker Protection	Interlock by Controller Board
Dimensions Product excl. Packaging	633 x 506 x 860 (W x D x H, mm)
Dimensions Product incl. Packaging	735 x 570 x 1012 (W x D x H, mm)
Weight Gross / Net	61kg / 53kg

Operation Conditions	
Ambient Temperature	1 - 40°C
Water Supply Temperature	5 - 35°C
Water Supply Pressure	0,07-0,8MPa

Accessories
Scoop
Leg
Installation Kit

For more information please contact your local sales office:

Hoshizaki Belgium: info@hoshizaki.be
 Hoshizaki Deutschland: info@hoshizaki.de
 Hoshizaki France: info@hoshizaki.fr
 Hoshizaki Iberia: info@hoshizaki.es
 Hoshizaki Middle East: sales@hoshizaki.ae

Hoshizaki Nederland: sales@hoshizaki.nl
 Hoshizaki United Kingdom: uksales@hoshizaki.co.uk
 Other countries: sales@hoshizaki.nl

www.hoshizaki-europe.com