




fumagalli[®]
s i n c e 1 9 7 3

MADE IN
ITALY

TOP SELECTION PROJECT 2020

NEW



WARM
Light

DAY
Light

COLD
Light

KELVIN SETTABLE LAMP



NOEMI

PAG 12



SILOE

PAG 12



TOBIA

PAG 14



SIMON

PAG 14



ELIA

PAG 18



PIETRO

PAG 18



GLOBE

PAG 22



**CLASSIC
RANGE**

E27 HIGH POWER LED

CLASSIC RANGE



E27 HIGH POWER LED

INDOOR & OUTDOOR USE

-30 +80 °C 90% HUMIDITY

VOLTAGE SURGE RESISTANT

LVD EMC ERP 6000h

for details see pag. 59

Ø100	Ø100	Ø118	Ø138
15W 1800 lm	30W 3500 lm	50W 5300 lm	60W 7000 lm

E35.201.R20.Q1R



3070

**NEW VERSION
HIGH POWER LED**

NEBO/OFIR
NOEMI 2L
for details see pag. 12

MADE IN ITALY

HOREB/ELIA
for details see pag. 18



Q43.207.H1L

4180

NEBO/TOBIA
for details see pag. 14

Q33.201.Q1R

3000



U33.113.Q1R



LOT/SIMON
for details see pag. 14

OFIR/NOEMI
for details see pag. 12



E35.132.Q1R


MADE IN ITALY

ADVANTAGES



ANTI CORROSION


NO MAINTENANCE



UV-RAYS STABILIZED



DOUBLE INSULATION




NOT AFFECTED BY
CHEMICAL FERTILIZES



FULLY MODULAR
Ø60mm

RESIN POST OF A SINGLE PIECE WITHOUT JOINTS

Stronger, safer and more
durable

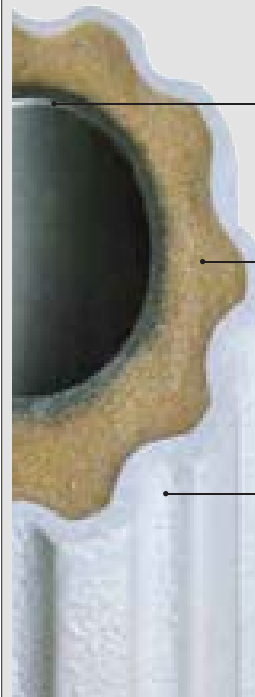




**INNER METAL
POLE STRUCTURE**
Structural metal pole
hot deep galvanized
inside and outside by
zinc bath immersion.

EXPANSE
High Density rigid
polyurethane provides
lightweight and
durable cohesion
between the inner
metal post and the
outer resin cover.

OUTER RESIN COVER
Outer coating of a single
piece without joints
made of shockproof
resin material:
- Rust and corrosion-free
- Paste molded colors, UV
stabilized
- Self-extinguishing on fire



SUGGESTED COMBINATIONS

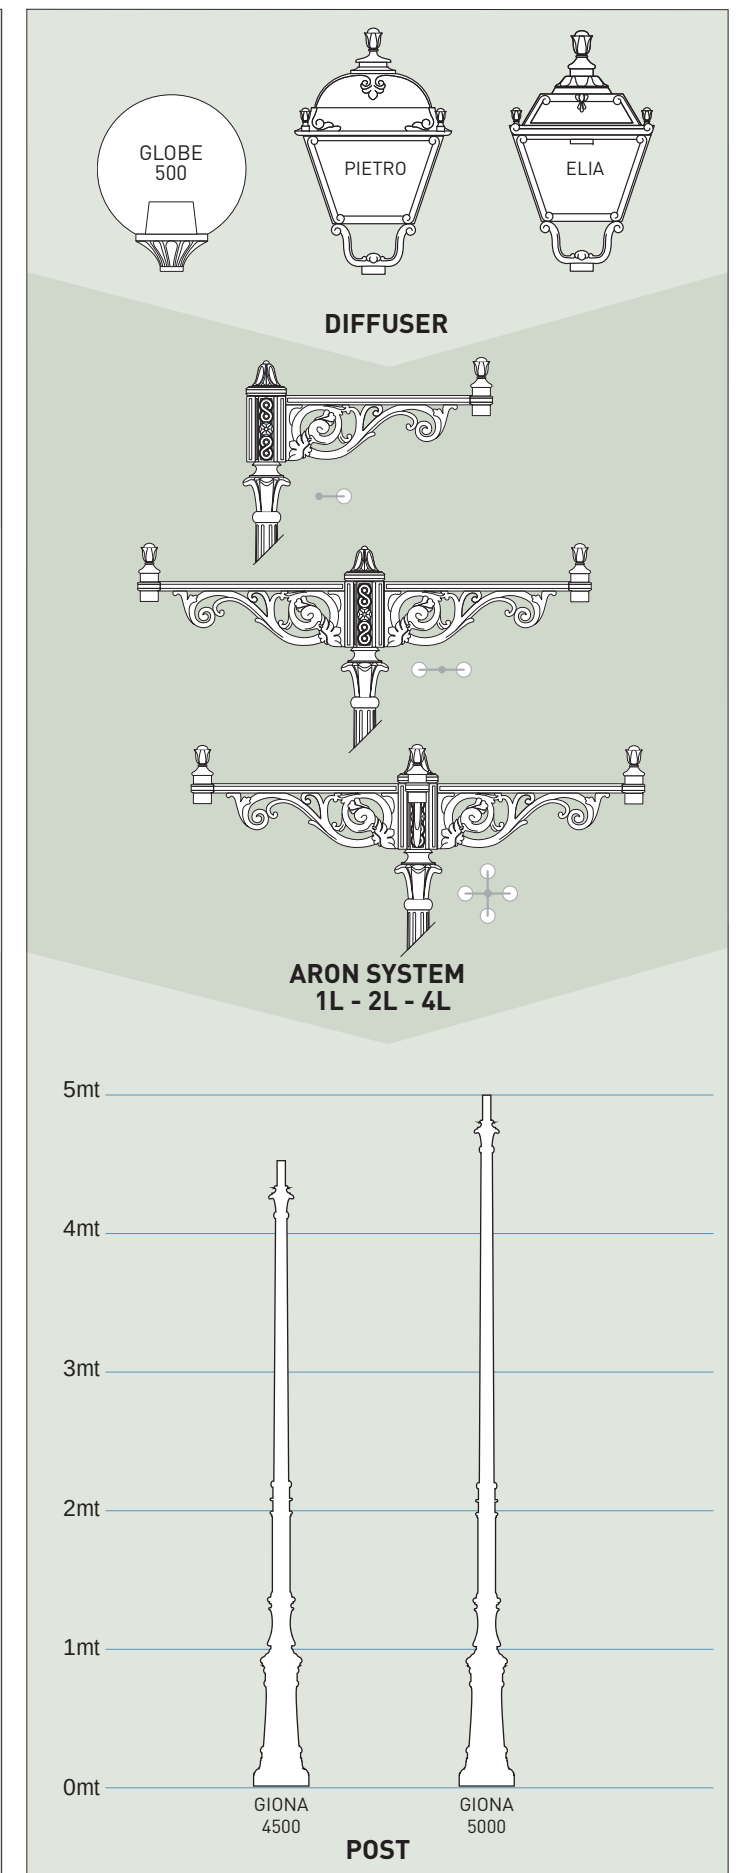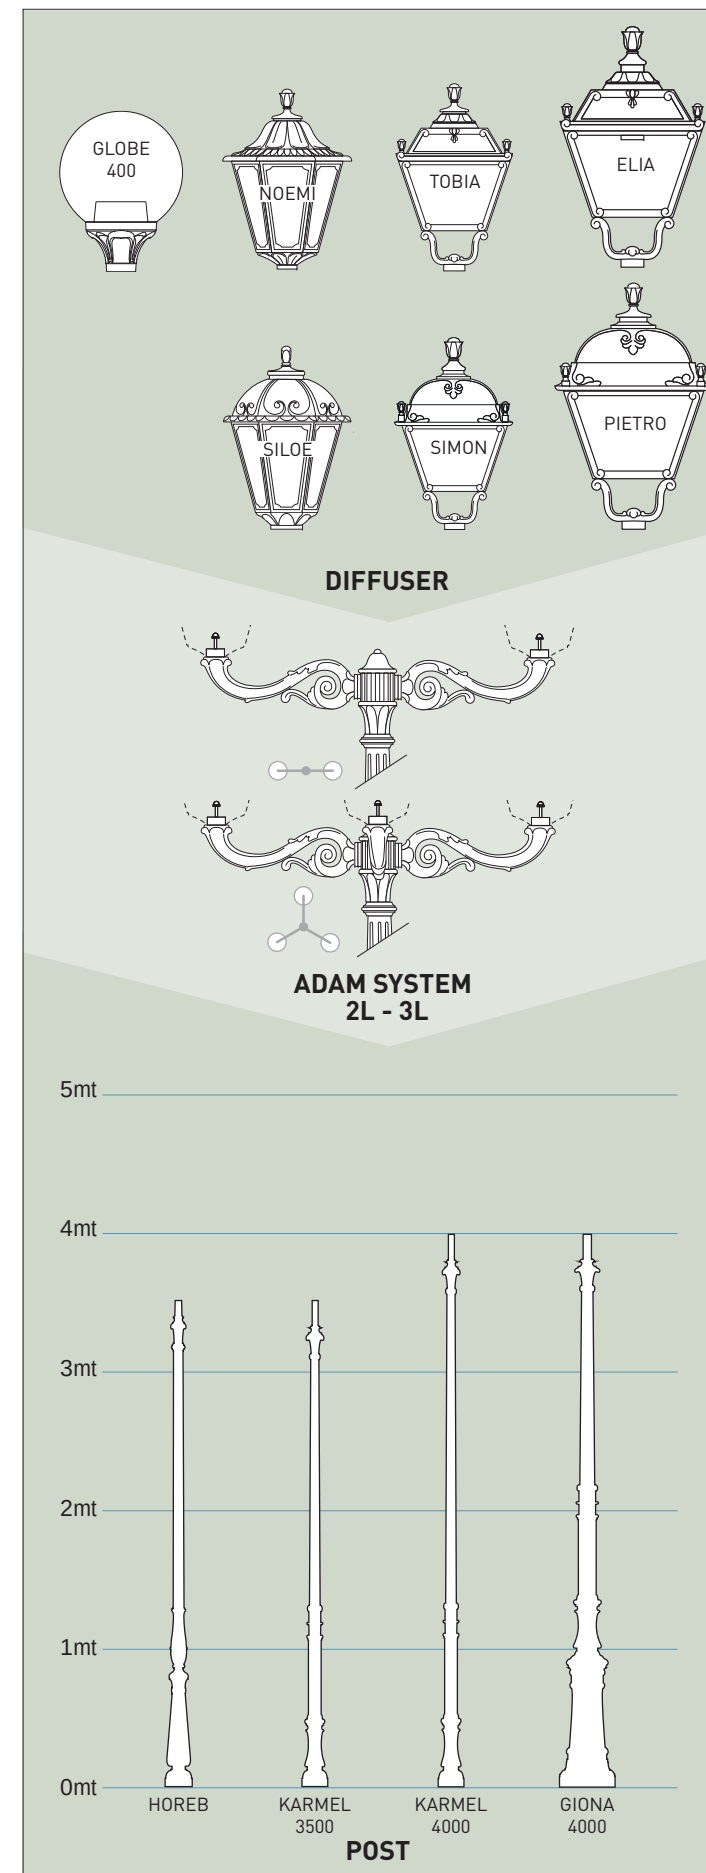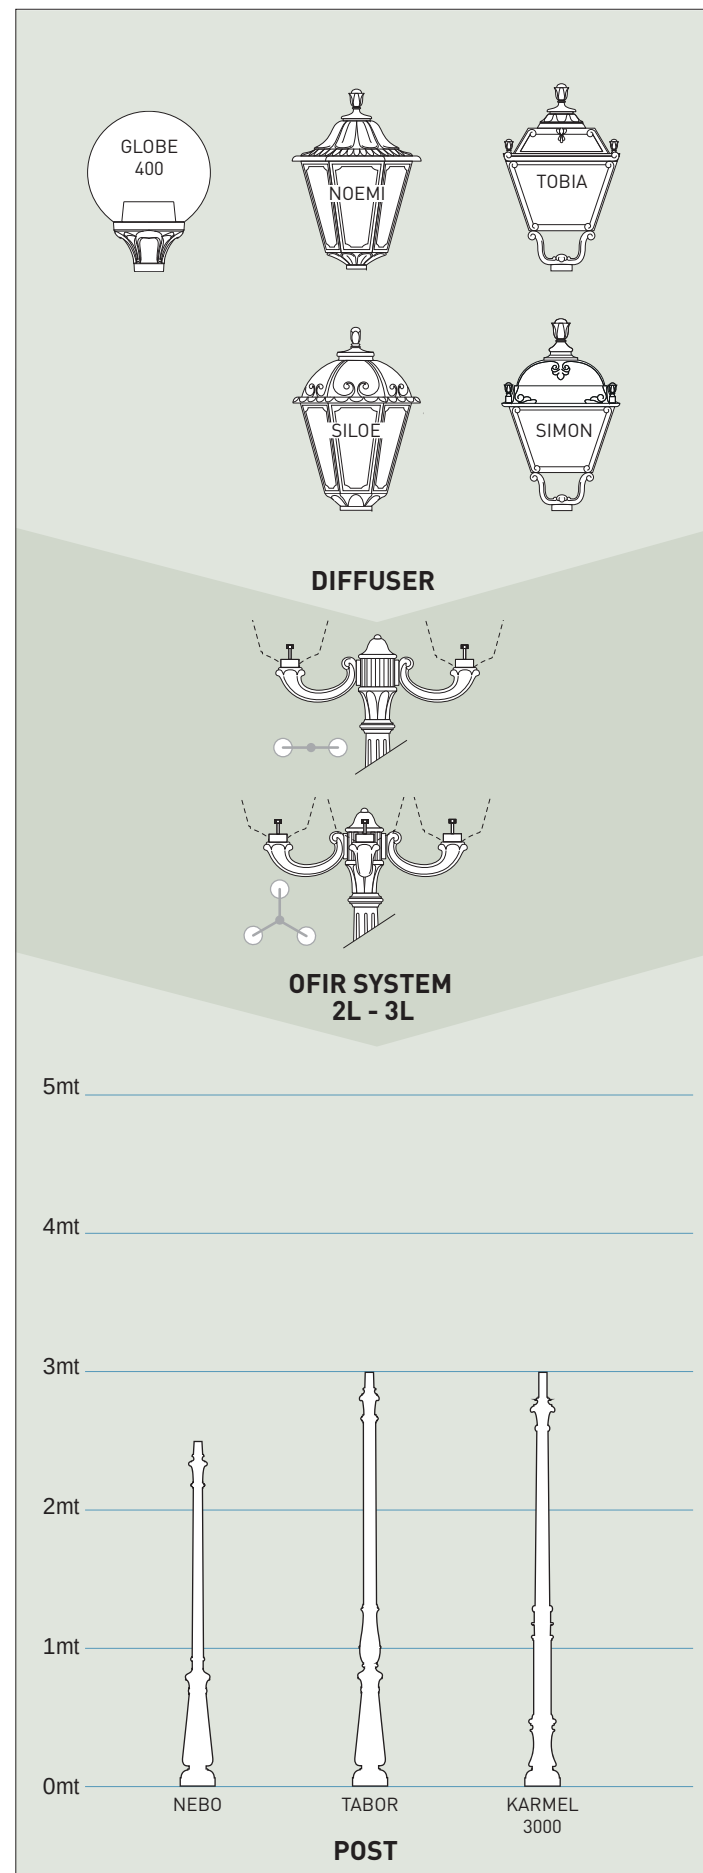

NOEMI/SILOE HIGH POWER LED
CLASSIC RANGE



E27 HIGH POWER LED

INDOOR &
OUTDOOR
USE




+80°C
-30°


90%
HUMIDITY


VOLTAGE SURGE
RESISTANT

30W (3500 lm)
50W (5300 lm)

More details at page 59

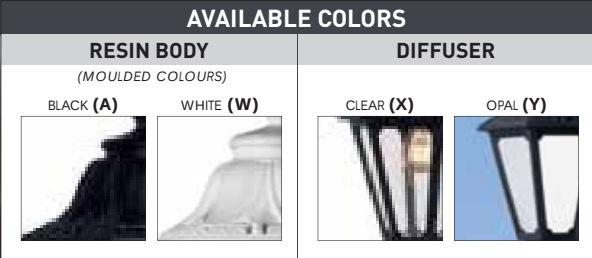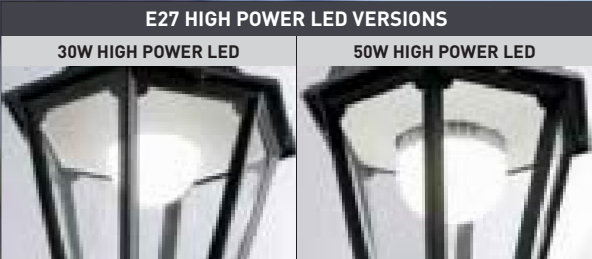


NOEMI-SILOE 30W HIGH POWER LED					
LAMP	POWER	LUMINOUS FLUX	VOLTAGE RANGE	COLOUR TEMPERATURE	
E27 HIGH POWER LED  Ø 100	30W	3500Lm	100-240V 50/60 Hz	4000K 3000K	NOEMI-SILOE = 70W HQI-SON

NOEMI-SILOE 50W HIGH POWER LED					
LAMP	POWER	LUMINOUS FLUX	VOLTAGE RANGE	COLOUR TEMPERATURE	
E27 HIGH POWER LED  Ø 118	50W	5300Lm	100-240V 50/60 Hz	4000K 3000K	NOEMI-SILOE = 100W HQI-SON



LAMP INCLUDED
HIGH POWER
LED E27


30W LED	4000K 3000K	E35.000.Q1L E35.000.Q1R
50W LED	4000K 3000K	E35.000.H1L E35.000.H1R






LAMP INCLUDED
HIGH POWER
LED E27

30W LED	4000K 3000K	K35.000.Q1L K35.000.Q1R
50W LED	4000K 3000K	K35.000.H1L K35.000.H1R



TOBIA/SIMON HIGH POWER LED
CLASSIC RANGE



E27 HIGH POWER LED

INDOOR & OUTDOOR USE

+80°C

-30°

90% HUMIDITY


VOLTAGE SURGE RESISTANT

30W (3500 lm)

50W (5300 lm)

More details at page 59



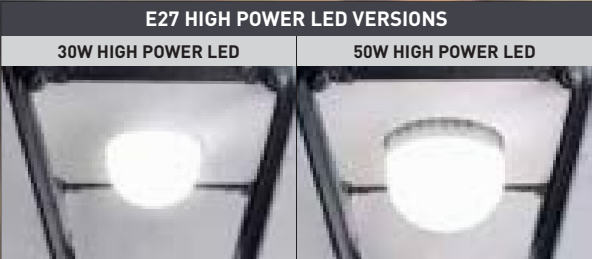

AVAILABLE COLORS

RESIN BODY
(MOULDED COLOURS)

BLACK (A)


WHITE (W)


DIFFUSER


CLEAR (X)

OPAL (Y)





TOBIA-SIMON 30W HIGH POWER LED					
LAMP	POWER	LUMINOUS FLUX	VOLTAGE RANGE	COLOUR TEMPERATURE	
 Ø 100	30W	3500Lm	100-240V 50/60 Hz	4000K 3000K	TOBIA-SIMON =  70W HQI-SON


TOBIA-SIMON 50W HIGH POWER LED					
LAMP	POWER	LUMINOUS FLUX	VOLTAGE RANGE	COLOUR TEMPERATURE	
 Ø 118	50W	5300Lm	100-240V 50/60 Hz	4000K 3000K	TOBIA-SIMON =  100W HQI-SON

TOBIA

LAMP INCLUDED
HIGH POWER
LED E27



30W LED	4000K	Q33.000.Q1L
	3000K	Q33.000.Q1R
50W LED	4000K	Q33.000.H1L
	3000K	Q33.000.H1R




520
Ø 60
330
330

SIMON

LAMP INCLUDED
HIGH POWER
LED E27




30W LED	4000K	U33.000.Q1L
	3000K	U33.000.Q1R
50W LED	4000K	U33.000.H1L
	3000K	U33.000.H1R



560
Ø 60
330
330

TOBIA/SIMON GX53 LED
CLASSIC RANGE



MADE IN ITALY



FLAT
DIFFUSER

GX53 LED VERSION
4x GX53

CCT SETTABLE
3000 K 4000 K 6500 K
SDCM <6

NEW

AVAILABLE COLORS

RESIN BODY (MOULDED COLOURS)		DIFFUSER	
BLACK (A)	WHITE (W)	CLEAR (X)	OPAL (Y)



ENERGY LABEL
A+ A A- B C D E

TOBIA-SIMON 28W GX53 LED					NEW
LAMP	POWER	LUMINOUS FLUX	VOLTAGE RANGE	CCT SETTABLE	
	4x7W 28W	3200Lm	100-240V 50/60 Hz	6500K/4000K/3000K	TOBIA-SIMON = 70W HQI-SON

TOBIA-SIMON 40W GX53 LED					NEW
LAMP	POWER	LUMINOUS FLUX	VOLTAGE RANGE	CCT SETTABLE	
	4x10W 40W	4800Lm	100-240V 50/60 Hz	6500K/4000K/3000K	TOBIA-SIMON = 100W HQI-SON

TOBIA

LAMP INCLUDED: 4x GX53 LED

LED GX53 LAMP INCLUDED	4x7W 28W	Q35.000.C4K
CCT SET	4x10W 40W	Q35.000.D4K

**NEW VERSION
CCT SETTABLE LAMP**


SIMON

LAMP INCLUDED: 4x GX53 LED

LED GX53 LAMP INCLUDED	4x7W 28W	U35.000.C4K
CCT SET	4x10W 40W	U35.000.D4K

**NEW VERSION
CCT SETTABLE LAMP**

ELIA/PIETRO HIGH POWER LED
CLASSIC RANGE



NEW VERSION
HIGH POWER LED

NEW HIGH POWER LED

INDOOR & OUTDOOR USE

+80°C
-30°


90% HUMIDITY

VOLTAGE SURGE RESISTANT

50W (5300 lm)
60W (7000 lm)

More details at page 59

AVAILABLE COLORS			
RESIN BODY (MOULDED COLOURS)		DIFFUSER	
BLACK (A)	WHITE (W)	CLEAR (X)	OPAL (Y)



ELIA/PIETRO 50W HIGH POWER LED					
LAMP	POWER	LUMINOUS FLUX	VOLTAGE RANGE	COLOUR TEMPERATURE	
 Ø 118	50W	5300Lm	100-240V 50/60 Hz	4000K 3000K	ELIA-PIETRO = 70W HQI-SON

ELIA/PIETRO 60W HIGH POWER LED					
LAMP	POWER	LUMINOUS FLUX	VOLTAGE RANGE	COLOUR TEMPERATURE	
 Ø 138	60W	7000Lm	100-240V 50/60 Hz	4000K 3000K	ELIA-PIETRO = 100W HQI-SON

ELIA

LAMP INCLUDED HIGH POWER LED E27

50W	4000K Q43.000.H1L 3000K Q43.000.H1R
60W	4000K Q43.000.W1L 3000K Q43.000.W1R

NEW


PIETRO

LAMP INCLUDED HIGH POWER LED E27

50W	U43.000.H1L U43.000.H1R
60W	U43.000.W1L U43.000.W1R

NEW

ELIA/PIETRO GX53 LED
CLASSIC RANGE



MADE IN ITALY



GX53 LED VERSION
8x GX53 LED


CCT SETTABLE
3000 K 4000 K 6500 K
SDCM <6

NEW

AVAILABLE COLORS

RESIN BODY (MOULDED COLOURS)		DIFFUSER	
BLACK (A)	WHITE (W)	CLEAR (X)	OPAL (Y)

FLAT
DIFFUSER



ELIA/PIETRO 56W GX53 LED				
LAMP	POWER	LUMINOUS FLUX	VOLTAGE RANGE	CCT SETTABLE
	8x7W 56W	6400lm	100-240V 50/60 Hz	6500K/4000K/3000K
ELIA-PIETRO = 100W HQI-SON				

ELIA/PIETRO 80W GX53 LED				
LAMP	POWER	LUMINOUS FLUX	VOLTAGE RANGE	CCT SETTABLE
	8x10W 80W	9600lm	100-240V 50/60 Hz	6500K/4000K/3000K
ELIA-PIETRO = 150W HQI-SON				

ELIA

LAMP INCLUDED:
8x GX53 LED

LED
GX53 LAMP INCLUDED

CCT SET

8x7W 56W	Q45.000.C8K
8x10W 80W	Q45.000.D8K

FLAT DIFFUSER FOR GX53 LED VERSION

**NEW VERSION
CCT SETTABLE LAMP**

PIETRO

LAMP INCLUDED:
8x GX53 LED

LED
GX53 LAMP INCLUDED

CCT SET

8x7W 56W	U45.000.C8K
8x10W 80W	U45.000.D8K

FLAT DIFFUSER FOR GX53 LED VERSION

**NEW VERSION
CCT SETTABLE LAMP**

GLOBE 400/GLOBE 500

CLASSIC RANGE



AVAILABLE COLORS				
RESIN BODY (MOULDED COLOURS)		DIFFUSER		
BLACK (A)	WHITE (W)	CLEAR (X)	OPAL (Y)	SMOKED (Z)



GLOBE 400



E27	G40.B40.E27
-----	-------------

ALUMINIUM CHROME LOUVRE

UPWARD .FC1

DOWNWARD .FC6

GLOBE 500



E27	G50.B50.E27
E40	G50.B50.E40

ALUMINIUM CHROME LOUVRE

UPWARD .FC1

DOWNWARD .FC6

E27 VERSION

SUITABLE FOR

HQI - SON

CLASSIC POLES



EACH POST IS SUPPLIED WITH THE SUITABLE CAGE FOR FIXATION

NEBO		TABOR		HOREB		KARMEL 3000		KARMEL 3500	
without door	000.201	without door	000.204	without door	000.207	without door	000.231	without door	000.234
with door	000.202	with door	000.205	with door	000.208	with door	000.232	with door	000.235
with door & box	000.203	with door & box	000.206	with door & box	000.209	with door & box	000.233	with door & box	000.236

AVAILABLE COLORS MOULDED COLOURS		EACH POST IS SUPPLIED WITH THE SUITABLE CAGE FOR FIXATION			
BLACK (A)	WHITE (W)	 CAGE - C		 CAGE - D	
		 CAGE - E			
KARMEL 4000		GIONA 4000		GIONA 4500	
without door	000.237	without door	000.221	without door	000.224
with door	000.238	with door	000.222	with door	000.225
with door & box	000.239	with door & box	000.223	with door & box	000.226
 cage type D		 cage type E		 cage type E	
		GIONA 5000			
without door	000.227	without door	000.227	without door	000.227
with door	000.228	with door	000.228	with door	000.228
with door & box	000.229	with door & box	000.229	with door & box	000.229
		 cage type E			

WALL BRACKETS/BASE



POST TOP SYSTEMS

OFIR WALL BRACKET

H.132.WAL

suggested diffuser:
SILOE - NOEMI
SIMON - TOBIA
GLOBE 400

FULLY MODULAR

The unique 60mm hub allows thousands of different possible combinations to create your perfect outdoor light fitting.

OFIR SYSTEM 2L

000.000.R20

suggested diffuser:
SILOE - NOEMI
SIMON - TOBIA
GLOBE 400

Ø60

OFIR SYSTEM 3L

000.000.R30

suggested diffuser:
SILOE - NOEMI
SIMON - TOBIA
GLOBE 400

Ø60

ADAM WALL BRACKET

H.171.WAL

suggested diffuser:
SILOE - NOEMI
SIMON - TOBIA
ELIA - PIETRO
GLOBE

LOT BASE

H.113

suggested diffuser:
SILOE - NOEMI
SIMON - TOBIA
ELIA - PIETRO
GLOBE

ADAM SYSTEM 2L

000.000.M20

suggested diffuser:
SILOE - NOEMI
SIMON - TOBIA
ELIA - PIETRO
GLOBE

Ø60

ADAM SYSTEM 3L

000.000.M30

suggested diffuser:
SILOE - NOEMI
SIMON - TOBIA
ELIA - PIETRO
GLOBE

Ø60

ARON WALL BRACKET

H.172 + H.172.WAL

suggested diffuser:
ELIA - PIETRO
GLOBE 500

ARON SYSTEM 1L

000.000.N10

suggested diffuser:
ELIA - PIETRO
GLOBE 500

Ø60

ARON SYSTEM 2L

000.000.N20

suggested diffuser:
ELIA - PIETRO
GLOBE 500

Ø60

ARON SYSTEM 4L

000.000.N40

suggested diffuser:
ELIA - PIETRO
GLOBE 500

Ø60



GIUSEPPE

PAG 34



GINO

GINO400 PAG 40
GINO500 PAG 46



REMO

REMO400 PAG 40
REMO500 PAG 46



VIVI

VIVI400 PAG 36
VIVI500 PAG 42



ECOVIVI

ECOVIVI400 PAG 38
ECOVIVI500 PAG 44



BEPPE

BEPPE400 PAG 36
BEPPE500 PAG 42



ECOBEPPE

ECOBEPPE400 PAG 38
ECOBEPPE500 PAG 44



GLOBE

GLOBE400 PAG 48
GLOBE500 PAG 48



**MODERN
RANGE**

E27 HIGH POWER LED

MODERN RANGE



420

CB

IECEE CB SCHEME

VIVI 400

for details see pag. 36

680

CB

IECEE CB SCHEME

BEPPE 400

for details see pag. 36

NEW

715

CB

IECEE CB SCHEME

GINO 400

for details see pag. 40

NEW

715

CB

IECEE CB SCHEME

REMO 400

for details see pag. 40

600

CB

IECEE CB SCHEME

VIVI 500

for details see pag. 42

850

CB

IECEE CB SCHEME

BEPPE 500

for details see pag. 42

NEW

850

CB

IECEE CB SCHEME

GINO 500

for details see pag. 46

NEW

850

CB

IECEE CB SCHEME

REMO 500

for details see pag. 46

E27 HIGH POWER LED

SILICONE PROTECTION DRIVER

INDOOR & OUTDOOR USE

-30 +80 °C 90% HUMIDITY

VOLTAGE SURGE RESISTANT

CE

CB

LVD EMC ERP 6000h

IECEE

for details see pag. 59

Ø100

15W 1800 lm

Ø100

30W 3500 lm


Ø118

50W 5300 lm

Ø138

60W 7000 lm

V50.364.A10.H1L




3255

EKTOR 3000
MIDIPILAR/
VIVI 400 1L
for details see pag. 36

MADE IN ITALY

P50.361.H1L

EKTOR 2500/
BEPPE 400
for details see pag. 36



3065

EKTOR 2500/
GIORGIO
for details see pag. 34

4P2.361.G10.E28



2700



MADE IN ITALY

R50.254.Q1L

MIDIPILAR/
REMO 400
for details see pag. 40

F50.115.Q1L

NEW LOT/
GINO 400
for details see pag. 40

MADE IN ITALY

ADVANTAGES



ANTI CORROSION




NO MAINTENANCE




UV-RAYS STABILIZED



DOUBLE INSULATION




NOT AFFECTED BY
CHEMICAL FERTILIZES




FULLY MODULAR
Ø60mm

SINGLE LIGHT

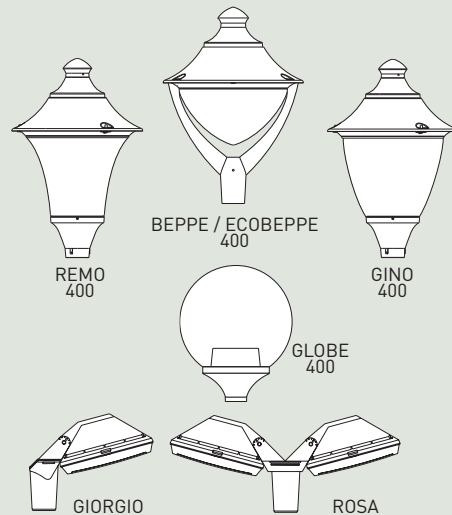


DIFFUSER

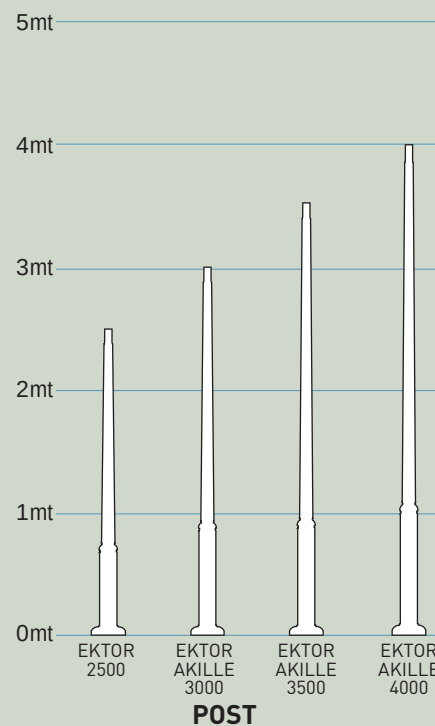


POST

SINGLE LIGHT

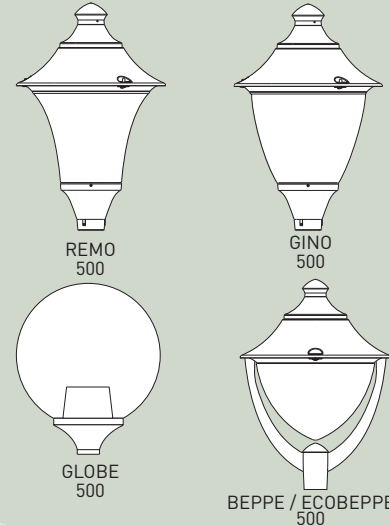


DIFFUSER

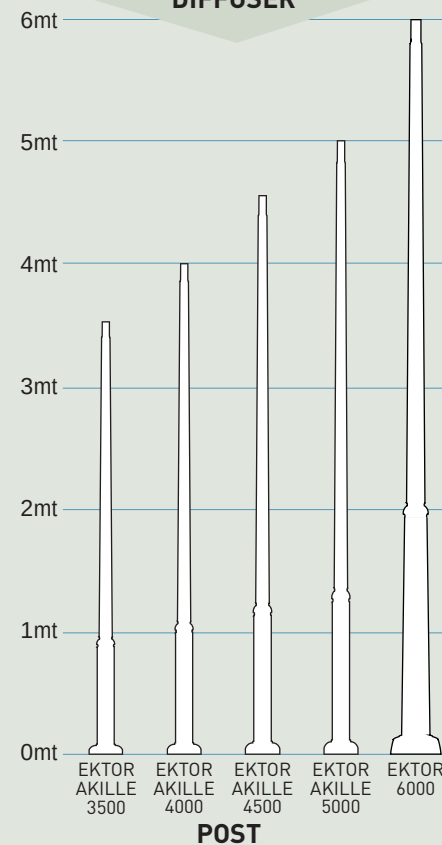

POST

**RESIN
POST OF
A SINGLE
PIECE
WITHOUT
JOINTS**

Stronger, safer
and more
durable

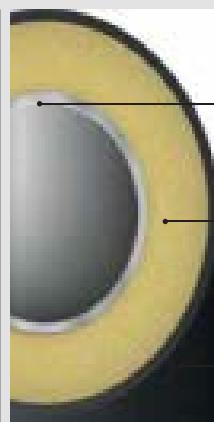

INNER METAL POLE STRUCTURE
Structural metal pole hot deep galvanized
inside and outside by zinc bath immersion.


EXPANSE
High Density rigid polyurethane provides
lightweight and durable cohesion
between the inner metal post and the
outer resin cover.

OUTER RESIN COVER
Outer coating of a single piece without joints
made of shockproof resin material:
- Rust and corrosion-free
- Paste molded colors, UV stabilized
- Self-extinguishing on fire




SUGGESTED COMBINATIONS


MULTI-HEAD LIGHTS

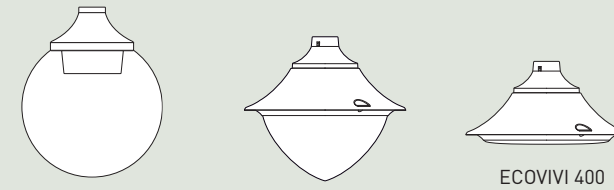

DIFFUSER

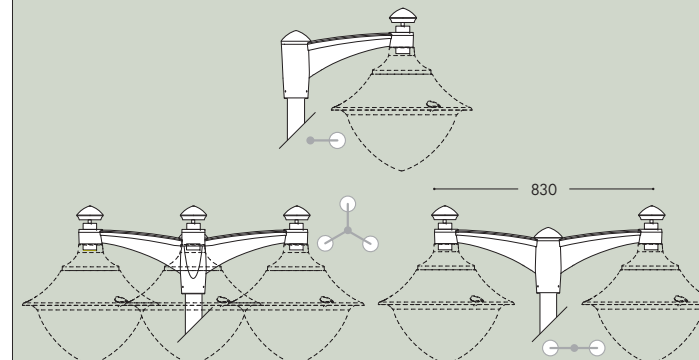

**MIDIPILAR
1L - 2L - 3L**

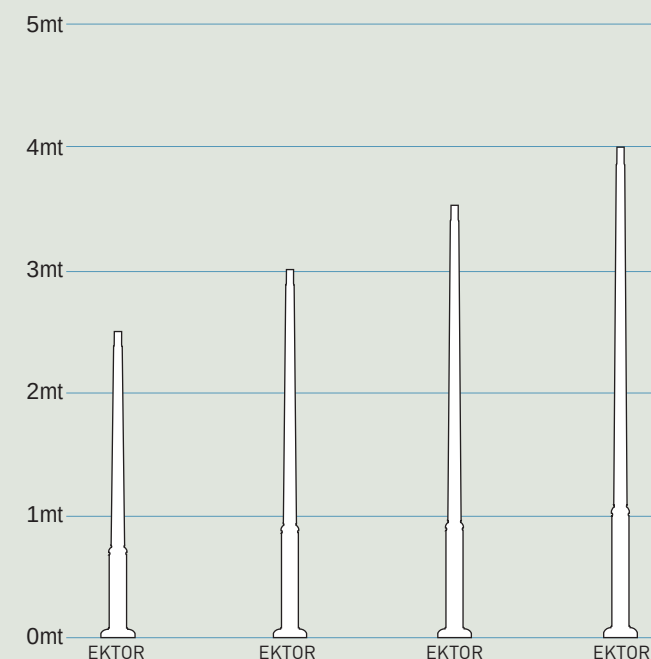


POST


MULTI-HEAD LIGHTS



DIFFUSER

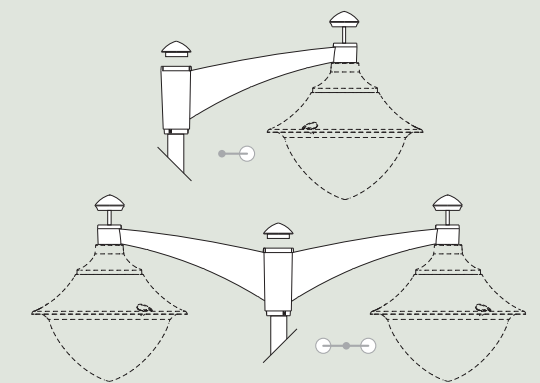

**PILAR
1L - 2L**

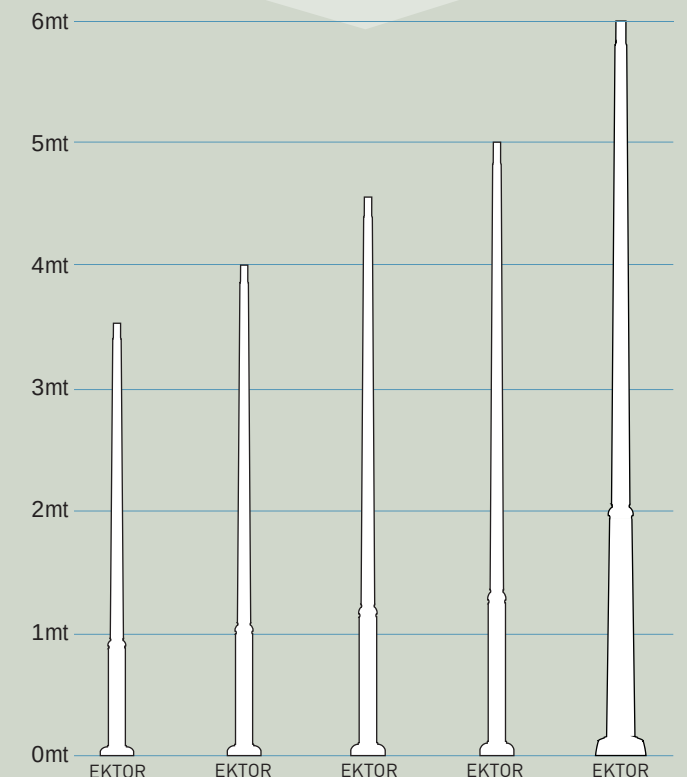

POST

GIORGIO/ROSA
MODERN RANGE



MADE IN ITALY




CCT SETTABLE

3000 K 4000 K 6500 K


SDCM <6

NEW

GX53 MODULAR LED LIGHT SYSTEM

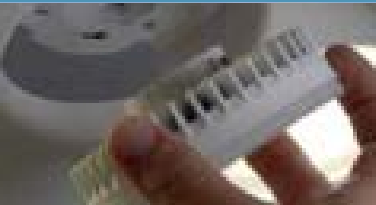


- **Cost saving:** long-life and efficient LED light sources
- **Built-in driver:** quick and easy lamp replacement
- **Great flexibility:** GX53 standard lamp holder
- **Future-proofed luminaries:** performances easy to upgrade to latest technology developments



AVAILABLE COLORS			DIFFUSER
RESIN BODY (MOULDED COLOURS)			OPAL (Y)
BLACK (A)	GREY (L)	WHITE (W)	

AVAILABLE VERSIONS		
GX53 LED	4x GX53	2x E27
LED GX53	CCT SET GX53 LED GX53	CFL LED



GIORGIO/ROSA 4xGX53 LED				
LAMP	POWER	LUMINOUS FLUX	VOLTAGE RANGE	CCT SETTABLE
	4x7W 28W	3200Lm	100-240V 50/60 Hz	6500K/4000K/3000K
TOBIA-SIMON = 70W HQI-SON				

GIORGIO/ROSA GX53 LED				
LAMP	POWER	LUMINOUS FLUX	VOLTAGE RANGE	CCT SETTABLE
	4x10W 40W	4800Lm	100-240V 50/60 Hz	6500K/4000K/3000K
TOBIA-SIMON = 100W HQI-SON				

GX53 LED

LAMP INCLUDED:
4x GX53 LED

GIORGIO

2xE27

2xE27 4P2.000.G10.E28

GX53 4000K 4P1.000.G10.E1L
18W 3000K 4P1.000.G10.E1R

4x7W CCT SET 4P2.000.G10.C4K
28W

4x10W CCT SET 4P2.000.G10.D4K
40W

NEW VERSION
CCT SETTABLE LAMP

420
153
300
Ø60



GX53 LED

LAMP INCLUDED:
8x GX53 LED

ROSA

2xE27

2xE27 4P2.000.G20.E28

GX53 4000K 4P1.000.G20.E1L
36W 3000K 4P1.000.G20.E1R

2x28W CCT SET 4P2.000.G20.C4K
56W

2x40W CCT SET 4P2.000.G20.D4K
80W

NEW VERSION
CCT SETTABLE LAMP

700
153
300
Ø60



VIVI/BEPPE 400
MODERN RANGE



MADE IN ITALY



NEW HIGH POWER LED

INDOOR & OUTDOOR USE

+80°C
-30°


90% HUMIDITY

VOLTAGE SURGE RESISTANT

30W (3500 lm)
50W (5300 lm)

More details at page 59

AVAILABLE COLORS			DIFFUSER	
RESIN BODY (MOULDED COLOURS)				
BLACK (A)	GREY (L)	WHITE (W)	CLEAR (X)	OPAL (Y)



VIVI/BEPPE 400 GX53 LED				
LAMP	POWER	LUMINOUS FLUX	VOLTAGE RANGE	CCT SETTABLE
	6x7W 42W	4800Lm	100-240V 50/60 Hz	6500K/4000K/3000K
	6x10W 60W	7200Lm	100-240V 50/60 Hz	6500K/4000K/3000K

VIVI/BEPPE 400 HIGH POWER LED					
LAMP	POWER	LUMINOUS FLUX	VOLTAGE RANGE	COLOUR TEMPERATURE	
	30W	3500Lm	100-240V 50/60 Hz	4000K	VIVI-BEPPE 400 50W HQI-SON
	50W	5300Lm	100-240V 50/60 Hz	4000K	VIVI-BEPPE 400 70W HQI-SON

GX53 LED


LAMP INCLUDED:
6x GX53 LED



NEW VERSION
CCT SETTABLE LAMP

VIVI 400

30W	4000K	V50.000.Q1L
	3000K	V50.000.Q1R
50W	4000K	V50.000.H1L
	3000K	V50.000.H1R
6x7W 42W	CCT SET	V50.000.C6K
6x10W 60W	CCT SET	V50.000.D6K



HIGH POWER LED

LAMP INCLUDED:
HIGH POWER LED E27



GX53 LED


LAMP INCLUDED:
6x GX53 LED



NEW VERSION
CCT SETTABLE LAMP

BEPPE 400

30W	4000K	P50.000.Q1L
	3000K	P50.000.Q1R
50W	4000K	P50.000.H1L
	3000K	P50.000.H1R
6x7W 42W	CCT SET	P50.000.C6K
6x10W 60W	CCT SET	P50.000.D6K



HIGH POWER LED

LAMP INCLUDED:
HIGH POWER LED E27



MADE IN ITALY

ECOVIVI/ECOBEPPE 400

MODERN RANGE



MADE IN ITALY



CCT SETTABLE

3000 K 4000 K 6500 K


SDCM <6

NEW


GX53 MODULAR LED LIGHT SYSTEM



- **Cost saving:** long-life and efficient LED light sources
- **Built-in driver:** quick and easy lamp replacement
- **Great flexibility:** GX53 standard lamp holder
- **Future-proofed luminaires:** performances easy to upgrade to latest technology developments



AVAILABLE COLORS			DIFFUSER
RESIN BODY (MOULDED COLOURS)			
BLACK (A)	GREY (L)	WHITE (W)	CLEAR (X)
			



ECOVIVI/ECOBEPPE 400 42W GX53 LED					NEW
LAMP	POWER	LUMINOUS FLUX	VOLTAGE RANGE	CCT SETTABLE	
	6x7W 42W	4800lm	100-240V 50/60 Hz	6500K/4000K/3000K	ECOVIVI- ECOBEPPE 400 = 70W HQI-SON

ECOVIVI/ECOBEPPE 400 60W GX53 LED					NEW
LAMP	POWER	LUMINOUS FLUX	VOLTAGE RANGE	CCT SETTABLE	
	6x10W 60W	7200lm	100-240V 50/60 Hz	6500K/4000K/3000K	ECOVIVI- ECOBEPPE 400 = 100W HQI-SON

GX53 LED

LAMP INCLUDED:
6x GX53
LED

ECOVIVI 400


E27

E27 EV4.000.E27

E40 EV4.000.E40

6x7W
42W CCT SET EV4.000.C6K

6x10W
60W CCT SET EV4.000.D6K



**NEW VERSION
CCT SETTABLE LAMP**

E27 VERSION

SUITABLE FOR

HQI - SON

GX53 LED

LAMP INCLUDED:
6x GX53
LED

ECOBEPPE 400


E27

E27 EP5.000.E27

E40 EP5.000.E40

6x7W
42W CCT SET EP5.000.C6K

6x10W
60W CCT SET EP5.000.D6K

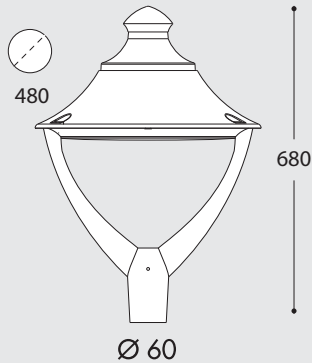

**NEW VERSION
CCT SETTABLE LAMP**


E27 VERSION

SUITABLE FOR

HQI - SON

GINO/REMO 400

MODERN RANGE



MADE IN ITALY

NEW VERSION
HIGH POWER LED

NEW HIGH POWER LED

INDOOR &
OUTDOOR
USE

+80°C
-30°

90%
HUMIDITY


VOLTAGE SURGE
RESISTANT

30W (3500 lm)
50W (5300 lm)

More details at page 59



AVAILABLE COLORS				
RESIN BODY (MOULDED COLOURS)			DIFFUSER	
BLACK (A)	GREY (L)	WHITE (W)	CLEAR (X)	OPAL (Y)



GINO/REMO 400 GX53 LED				
LAMP	POWER	LUMINOUS FLUX	VOLTAGE RANGE	CCT SETTABLE
	6x7W 42W	4800Lm	100-240V 50/60 Hz	GINO-REMO 400 HQL-SON 70W
	6x10W 60W	7200Lm	100-240V 50/60 Hz	GINO-REMO 400 HQL-SON 100W

GINO/REMO 400 HIGH POWER LED				
LAMP	POWER	LUMINOUS FLUX	VOLTAGE RANGE	COLOUR TEMPERATURE
	30W	3500Lm	100-240V 50/60 Hz	4000K 3000K
	50W	5300Lm	100-240V 50/60 Hz	4000K 3000K

GX53 LED


LAMP INCLUDED:
6x GX53
LED



NEW VERSION
CCT SETTABLE LAMP

GINO 400

30W	4000K	F50.000.Q1L
	3000K	F50.000.Q1R
50W	4000K	F50.000.H1L
	3000K	F50.000.H1R
6x7W 42W	CCT SET	F50.000.C6K
6x10W 60W	CCT SET	F50.000.D6K

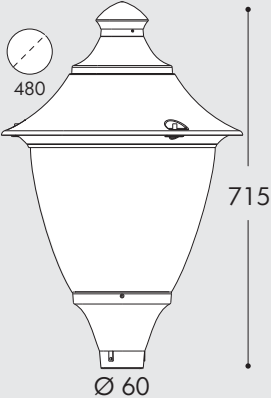

HIGH POWER LED

LAMP INCLUDED:
HIGH POWER
LED E27



NEW

GX53 LED


LAMP INCLUDED:
6x GX53
LED



NEW VERSION
CCT SETTABLE LAMP

REMO 400

30W	4000K	R50.000.Q1L
	3000K	R50.000.Q1R
50W	4000K	R50.000.H1L
	3000K	R50.000.H1R
6x7W 42W	CCT SET	R50.000.C6K
6x10W 60W	CCT SET	R50.000.D6K

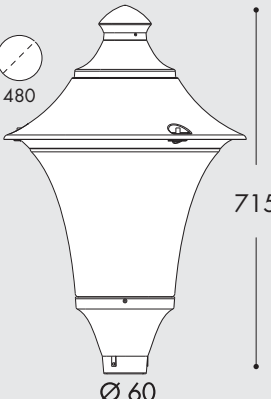

HIGH POWER LED


LAMP INCLUDED:
HIGH POWER
LED E27



NEW

MADE IN ITALY

VIVI/BEPPE 500
MODERN RANGE



MADE IN
ITALY



NEW HIGH POWER LED

INDOOR &
OUTDOOR
USE

+80°C
-30°


90%
HUMIDITY

VOLTAGE SURGE
RESISTANT

50W (5300 lm)
60W (7000 lm)

More details at page 59

AVAILABLE COLORS		
RESIN BODY (MOULDED COLOURS)		
BLACK (A)	GREY (L)	WHITE (W)
DIFFUSER		
CLEAR (X)	OPAL (Y)	



VIVI/BEPPE 500 GX53 LED					
LAMP	POWER	LUMINOUS FLUX	VOLTAGE RANGE	CCT SETTABLE	
	9x7W 63W	7200Lm	100-240V 50/60 Hz	6500K/4000K/3000K	VIVI-BEPPE 500 HQI-SON 100W
	9x10W 90W	10800Lm	100-240V 50/60 Hz	6500K/4000K/3000K	VIVI-BEPPE 500 HQI-SON 150W

NEW

VIVI/BEPPE 500 HIGH POWER LED					
LAMP	POWER	LUMINOUS FLUX	VOLTAGE RANGE	COLOUR TEMPERATURE	
	50W	5300Lm	100-240V 50/60 Hz	4000K 3000K	VIVI-BEPPE 500 HQI-SON 70W
	60W	7000Lm	100-240V 50/60 Hz	4000K 3000K	VIVI-BEPPE 500 HQI-SON 100W

GX53 LED


LAMP INCLUDED:
9x GX53
LED



NEW VERSION
CCT SETTABLE LAMP

VIVI 500

50W	4000K	V60.000.H1L
	3000K	V60.000.H1R
60W	4000K	V60.000.W1L
	3000K	V60.000.W1R
9x7W 63W	CCT SET	V60.000.C9K
9x10W 90W	CCT SET	V60.000.D9K

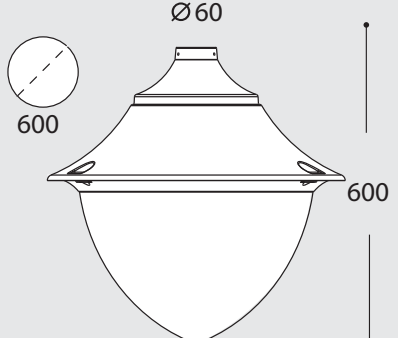

HIGH POWER LED

LAMP INCLUDED:
HIGH POWER
LED E27



GX53 LED


LAMP INCLUDED:
9x GX53
LED



NEW VERSION
CCT SETTABLE LAMP

BEPPE 500

50W	4000K	P60.000.H1L
	3000K	P60.000.H1R
60W	4000K	P60.000.W1L
	3000K	P60.000.W1R
9x7W 63W	CCT SET	P60.000.C9K
9x10W 90W	CCT SET	P60.000.D9K

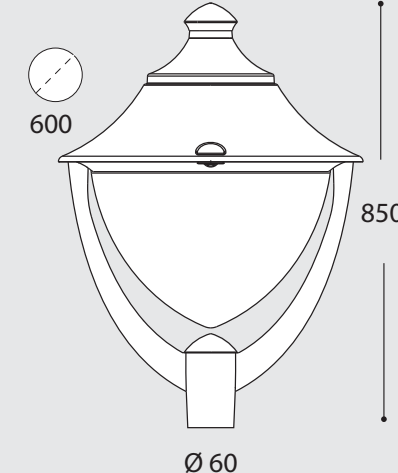

HIGH POWER LED

LAMP INCLUDED:
HIGH POWER
LED E27



MADE IN ITALY

ECOVIVI/ECOBEPPE 500

MODERN RANGE



MADE IN ITALY



CCT SETTABLE

3000 K 4000 K 6500 K


SDCM <6

NEW


GX53 MODULAR LED LIGHT SYSTEM



- **Cost saving:** long-life and efficient LED light sources
- **Built-in driver:** quick and easy lamp replacement
- **Great flexibility:** GX53 standard lamp holder
- **Future-proofed luminaries:** performances easy to upgrade to latest technology developments



AVAILABLE COLORS			DIFFUSER
RESIN BODY (MOULDED COLOURS)			CLEAR (X)
BLACK (A)	GREY (L)	WHITE (W)	



ECOVIVI/ECOBEPPE 500 63W GX53 LED				
LAMP	POWER	LUMINOUS FLUX	VOLTAGE RANGE	CCT SETTABLE
	9x7W 63W	7200Lm	100-240V 50/60 Hz	6500K/4000K/3000K
NEW ECOVIVI - ECOBEPPE 500 = 100W HQI-SON				

ECOVIVI/ECOBEPPE 500 90W GX53 LED				
LAMP	POWER	LUMINOUS FLUX	VOLTAGE RANGE	CCT SETTABLE
	9x10W 90W	10800Lm	100-240V 50/60 Hz	6500K/4000K/3000K
NEW ECOVIVI - ECOBEPPE 500 = 150W HQI-SON				

GX53 LED

LAMP INCLUDED:
9x GX53 LED



ECOVIVI 500 **E27**

E27 EV6.000.E27

E40 EV6.000.E40

9x7W **63W** **CCT SET** EV6.000.C9K

9x10W **90W** **CCT SET** EV6.000.D9K

Ø 60

600

300

NEW VERSION CCT SETTABLE LAMP

E27 VERSION
SUITABLE FOR **HQI - SON**

GX53 LED

LAMP INCLUDED:
9x GX53 LED



ECOBEPPE 500 **E27**

E27 EP6.000.E27

E40 EP6.000.E40

9x7W **63W** **CCT SET** EP6.000.C9K

9x10W **90W** **CCT SET** EP6.000.D9K

Ø 60

600

850


NEW VERSION CCT SETTABLE LAMP

E27 VERSION
SUITABLE FOR **HQI - SON**

MADE IN ITALY

GINO/REMO 500

MODERN RANGE



NEW VERSION
HIGH POWER LED

NEW HIGH POWER LED

INDOOR & OUTDOOR USE

+80°C
-30°

90% HUMIDITY

VOLTAGE SURGE RESISTANT

50W (5300 lm)

60W (7000 lm)

More details at page 59

AVAILABLE COLORS				
RESIN BODY (MOULDED COLOURS)			DIFFUSER	
BLACK (A)	GREY (L)	WHITE (W)	CLEAR (X)	OPAL (Y)



GINO/REMO 500 GX53 LED					GINO/REMO 500 HIGH POWER LED				
LAMP	POWER	LUMINOUS FLUX	VOLTAGE RANGE	CCT SETTABLE	LAMP	POWER	LUMINOUS FLUX	VOLTAGE RANGE	COLOUR TEMPERATURE
	9x7W 63W	7200Lm	100-240V 50/60 Hz	6500K/4000K/3000K		50W	5300Lm	100-240V 50/60 Hz	4000K
	9x10W 90W	10800Lm		6500K/4000K/3000K		60W	7000Lm		

GX53 LED

GINO 500

HIGH POWER LED

LAMP INCLUDED: 9x GX53 LED

50W

60W

9x7W 63W

9x10W 90W

4000K

3000K

F60.000.H1L

F60.000.H1R

4000K

3000K

F60.000.W1L

F60.000.W1R

CCT SET

CCT SET

F60.000.C9K

F60.000.D9K

NEW VERSION CCT SETTABLE LAMP

LAMP INCLUDED: HIGH POWER LED E27

GX53 LED

REMO 500

HIGH POWER LED

LAMP INCLUDED: 9x GX53 LED

50W

60W

9x7W 63W

9x10W 90W

4000K

3000K

R60.000.H1L

R60.000.H1R

4000K

3000K

R60.000.W1L

R60.000.W1R

CCT SET

CCT SET

R60.000.C9K

R60.000.D9K

NEW VERSION CCT SETTABLE LAMP

LAMP INCLUDED: HIGH POWER LED E27

GLOBE 400/GLOBE 500

MODERN RANGE



MADE IN ITALY




AVAILABLE COLORS					
RESIN BODY (MOULDED COLOURS)			DIFFUSER		
BLACK (A)	GREY (L)	WHITE (W)	CLEAR (X)	OPAL (Y)	SMOKED (Z)



GLOBE 400

E27 G41.B40.E27

ALUMINIUM
CHROME
LOUVRE




GLOBE 500

E27 G51.B50.E27

E40 G51.B50.E40

ALUMINIUM
CHROME
LOUVRE

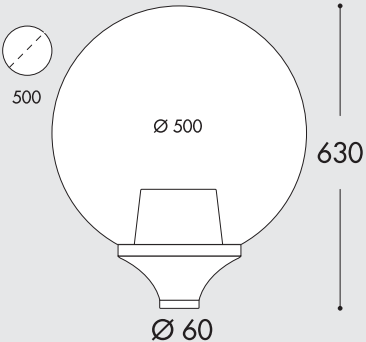

E27 VERSION
SUITABLE FOR
HQI - SON

MODERN POLES



ANTI CORROSION

UV-RAYS STABILIZED

NO MAINTENANCE


DOUBLE INSULATION

NOT AFFECTED BY CHEMICAL FERTILIZES




EACH POST IS SUPPLIED WITH THE SUITABLE CAGE FOR FIXATION

EKTOR 2500		EKTOR 3000		AKILLE 3000		EKTOR 3500		AKILLE 3500	
without door	000.361	without door	000.364		000.414	without door	000.367		000.417
with door	000.362	with door	000.365		000.415	with door	000.368		000.418
with door & box	000.363	with door & box	000.366		000.416	with door & box	000.369		000.419

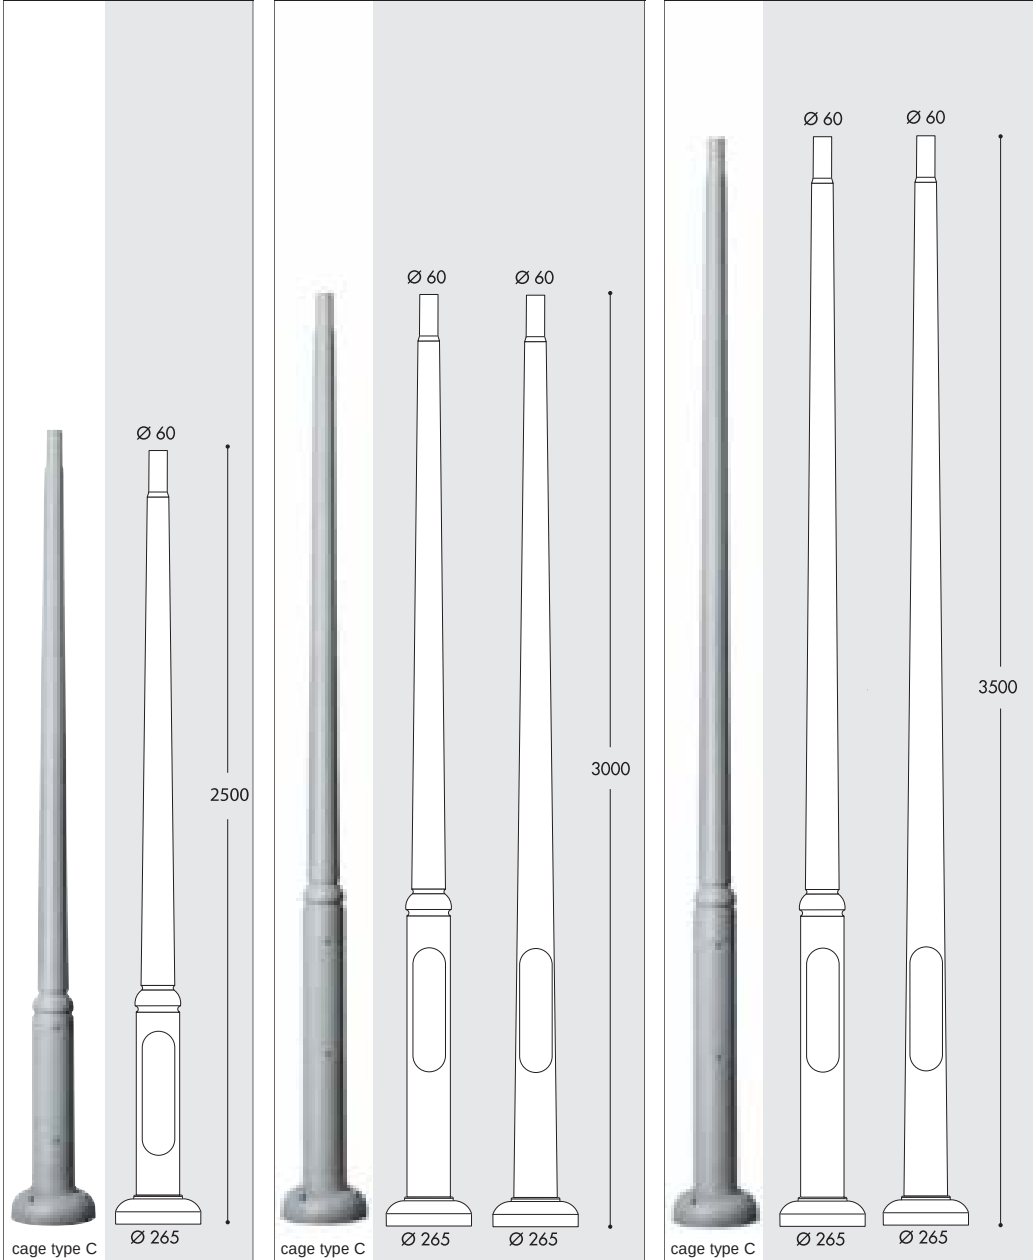

EKTOR 4000		AKILLE 4000	
without door	000.371		000.421
with door	000.372		000.422
with door & box	000.373		000.423

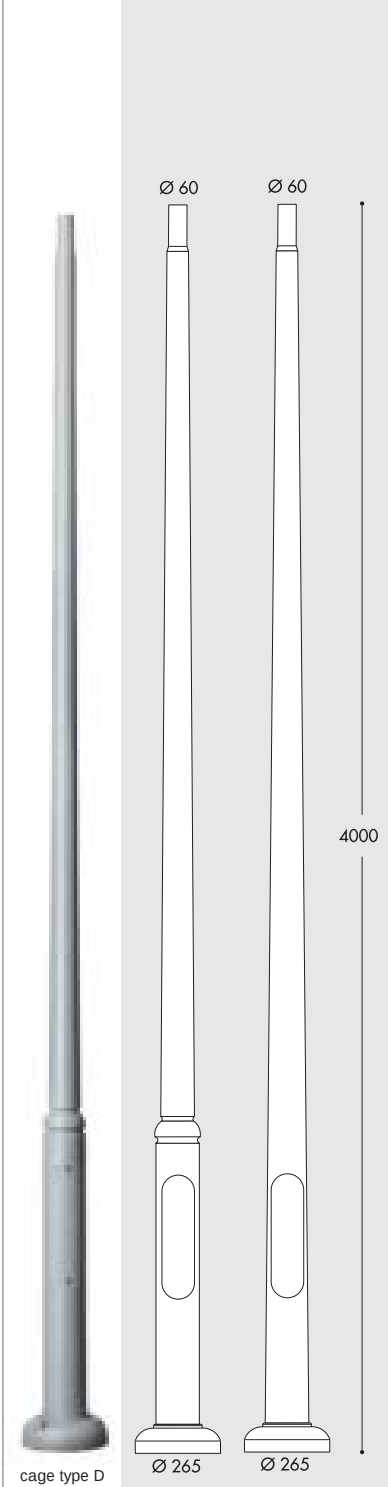


AVAILABLE COLORS
MOULDED COLOURS

BLACK (A) GREY (L) WHITE (W)


EACH POST IS SUPPLIED WITH THE SUITABLE CAGE FOR FIXATION

CAGE - C CAGE - D CAGE - E


EKTOR 4500		AKILLE 4500	
without door	000.374		000.424
with door	000.375		000.425
with door & box	000.376		000.426

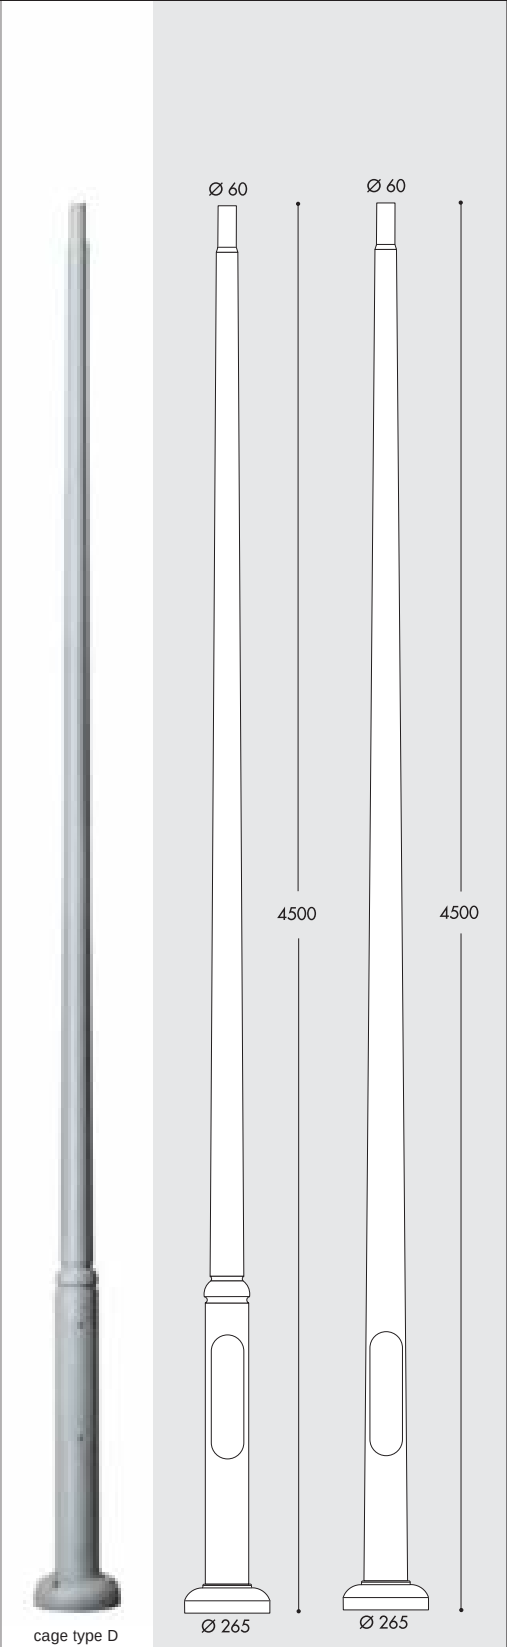

EKTOR 5000		AKILLE 5000	
without door	000.377		000.427
with door	000.378		000.428
with door & box	000.379		000.429

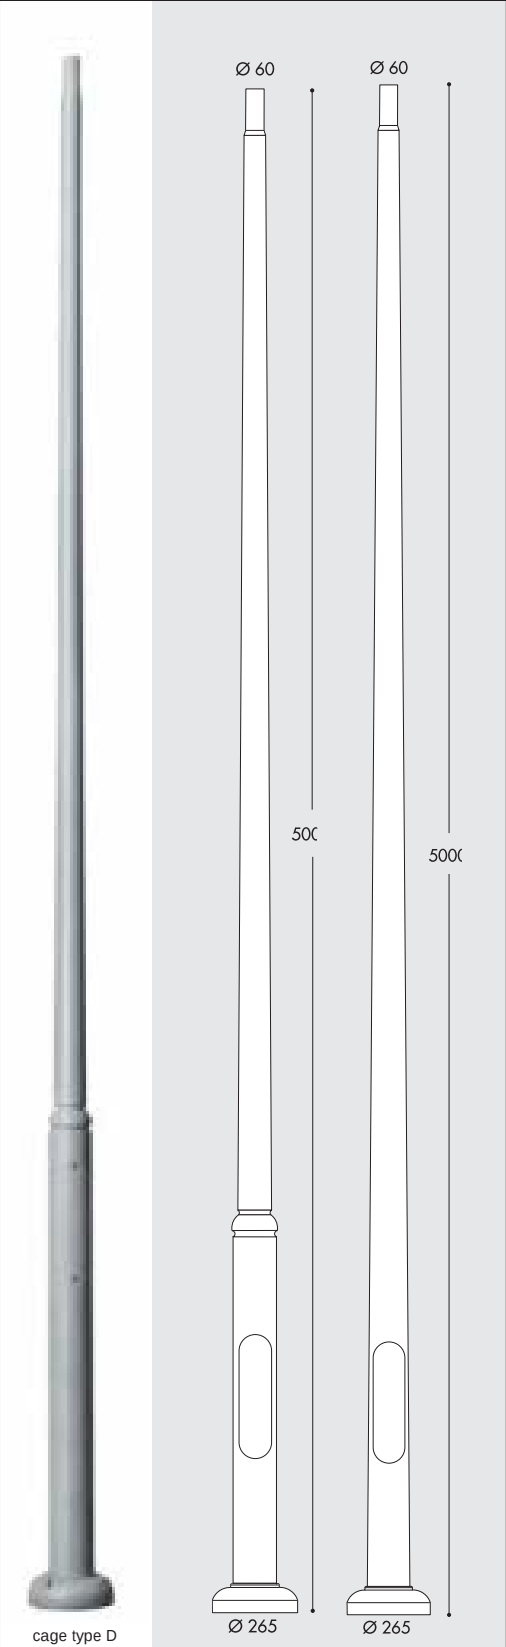

EKTOR 6000	
without door	000.384
with door	000.385
with door & box	000.386

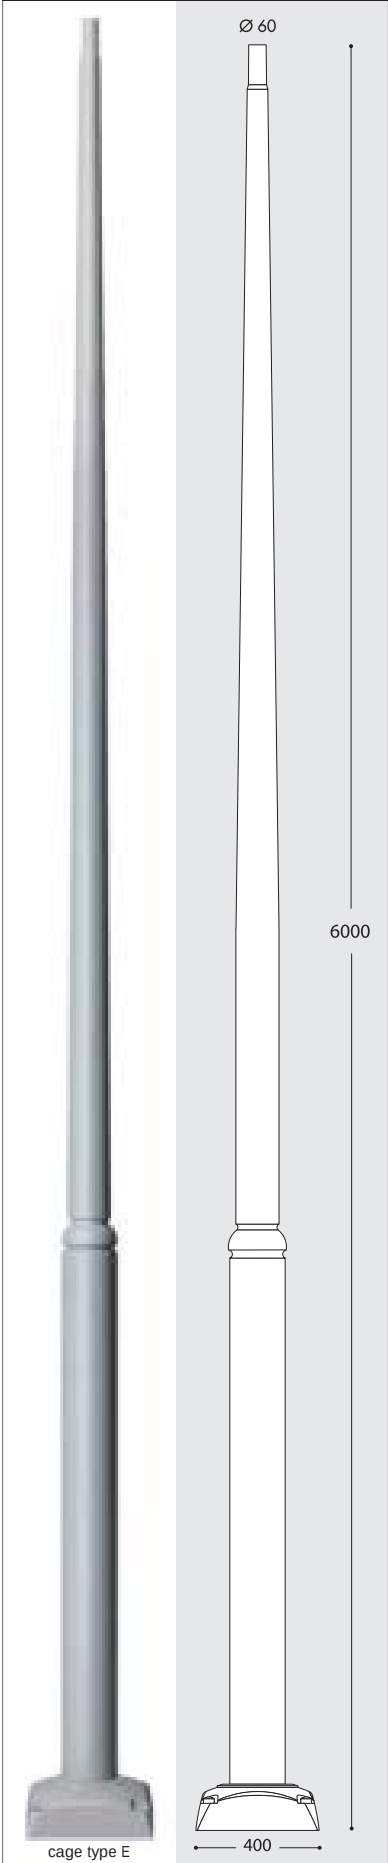

WALL BRACKETS/BASE



POST TOP SYSTEM

MIDIPILAR WALL BRACKET

H.254.WAL

suitable for:
GINO 400 · REMO400
VIVI 400 · ECOVIVI 400
GLOBE 400

MIDIPILAR SYSTEM 1L

000.000.A10

Ø60

suitable for:
VIVI 400 · ECOVIVI 400
GLOBE 400

MIDIPILAR SYSTEM 2L

000.000.A20

Ø60

suitable for:
VIVI 400 · ECOVIVI 400
GLOBE 400

MIDIPILAR SYSTEM 3L

000.000.A30

Ø60

suitable for:
VIVI 400 · ECOVIVI 400
GLOBE 400

PILAR WALL BRACKET

H.253.WAL

suitable for:
GINO 500 · REMO 500
VIVI 500 · ECOVIVI 500
BEPPE 500 · GLOBE 500

PILAR SYSTEM 1L

000.000.P10

Ø60

suitable for:
VIVI 500 · ECOVIVI 500
GLOBE 500

PILAR SYSTEM 2L

000.000.P20

Ø60

suitable for:
VIVI 500 · ECOVIVI 500
GLOBE 500

NEW LOT BASE

H.115

Ø60

suitable for:
GINO 400 · REMO400
VIVI 400 · ECOVIVI 400
BEPPE 400 · ECOBEPPE 400
GLOBE 400 · GINO 500
REMO500 · VIVI 500
ECOVIVI 500 · GLOBE 500

Ø 60mm

FULLY MODULAR
The unique 60mm hub allows thousands of different possible combinations to create your perfect outdoor light fitting.

LUIGI HIGH-BAY
 MODERN RANGE



MADE IN ITALY



CCT SETTABLE

3000 K 4000 K 6500 K

SDCM <6

NEW

GX53 MODULAR LED LIGHT SYSTEM

- **Cost saving:** long-life and efficient LED light sources
- **Built-in driver:** quick and easy lamp replacement
- **Great flexibility:** GX53 standard lamp holder
- **Future-proofed luminaries:** performances easy to upgrade to latest technology developments

NEW HIGH POWER LED

INDOOR & OUTDOOR USE

+80°C -30° 90% HUMIDITY

VOLTAGE SURGE RESISTANT

50W (5300 lm)
60W (7000 lm)

More details at page 59

AVAILABLE COLORS			DIFFUSER	
RESIN BODY (MOULDED COLOURS)				
BLACK (A)	GREY (L)	WHITE (W)	CLEAR (X)	OPAL (Y)



HIGH POWER LED					
LAMP	POWER	LUMINOUS FLUX	VOLTAGE RANGE	COLOUR TEMPERATURE	
E27 HIGH POWER LED Ø 100	30W	3500Lm	100-240V 50/60 Hz	4000K 3000K	= 50W HQI-SON
E27 HIGH POWER LED Ø 118	50W	5300Lm	100-240V 50/60 Hz	4000K 3000K	= 70W HQI-SON
E27 HIGH POWER LED Ø 138	60W	7000Lm	100-240V 50/60 Hz	4000K 3000K	= 100W HQI-SON

GX53 LED					
LAMP	POWER	LUMINOUS FLUX	VOLTAGE RANGE	CCT SETTABLE	
	6x7W 42W	4800Lm	100-240V 50/60 Hz	6500K/4000K/3000K	= 70W HQI-SON
	6x10W 60W	7200Lm	100-240V 50/60 Hz	6500K/4000K/3000K	= 100W HQI-SON
	9x7W 63W	7200Lm	100-240V 50/60 Hz	6500K/4000K/3000K	= 100W HQI-SON
	9x10W 90W	10800Lm	100-240V 50/60 Hz	6500K/4000K/3000K	= 150W HQI-SON

LUIGI 500-DR HIGH POWER LED

LAMP INCLUDED: HIGH POWER LED E27

50W LED 4000K L51.128.H1L
LED 3000K L51.128.H1R

60W LED 4000K L51.128.W1L
LED 3000K L51.128.W1R

9x7W 63W L5F.128.C9K CCT SET

9x10W 90W 5F.128.D9K CCT SET

LUIGI 500 GX53 LED

LAMP INCLUDED: GX53 LED

NEW VERSION CCT SETTABLE LAMP

LUIGI 400-DR HIGH POWER LED

LAMP INCLUDED: HIGH POWER LED E27

30W LED 4000K L41.128.Q1L
LED 3000K L41.128.Q1R

50W LED 4000K L41.128.H1L
LED 3000K L41.128.H1R




6x7W 42W L4F.128.C6K CCT SET



6x10W 60W LL4F.128.D6K CCT SET






LUIGI 400 GX53 LED





LAMP INCLUDED: GX53 LED





NEW VERSION CCT SETTABLE LAMP

G9 LED			
		POWER	1,7 W
		LUMINOUS FLUX	170 lm
		SIZE & SOCKET	
 		EFFICIENCY	100 lm/W
		VOLTAGE	100-240 V
		FREQUENCY	50/60 Hz
		CURRENT	17 mA
		COLOR RENDERING INDEX RA	80
		SDCM	< 6
		BEAM ANGLE	110°
		WARM UP TIME	≤ 0,5"
		SWITCHING CYCLE	> 40.000
		LIFETIME	15.000 h
		KELVIN	4000 K 3000 K
		REF. CODE	H.LED.G09.4K H.LED.G09.3K

GU10 LED - CCT SETTABLE			
		POWER	3,5 W
		LUMINOUS FLUX	350 lm
		SIZE & SOCKET	
   	   	EFFICIENCY	100 lm/W
		VOLTAGE	100-240 V
		FREQUENCY	50/60 Hz
		CURRENT	70 mA
		COLOR RENDERING INDEX RA	> 80
		SDCM	< 6
		BEAM ANGLE	36°
		WARM UP TIME	≤ 0,5"
		SWITCHING CYCLE	> 25.000
		LIFETIME	25.000 h
		KELVIN SETTABLE	2700 K / 4000 K
		REF. CODE	H.LED.GU10.CCT
		COMPARISON	3,5W = 50W halogen 400 Lm SAVE 92%

R7s LED 78mm - CCT SETTABLE			
		POWER	3,2 W
		LUMINOUS FLUX	400 lm
		SIZE & SOCKET	
 	 	EFFICIENCY	133 lm/W
		VOLTAGE	100-240 V
		FREQUENCY	50/60 Hz
		CURRENT	75 mA
		POWER FACTOR	> 0,5
		COLOR RENDERING INDEX RA	> 80
		SDCM	< 6
		BEAM ANGLE	360°
		WARM UP TIME	≤ 0,5"
		SWITCHING CYCLE	45.000
		LIFETIME	25.000 h
		KELVIN	2700 K / 4000 K / 6500 K
		REF. CODE	H7.LED.R7S.CCT

R7s LED 118mm - CCT SETTABLE			
		POWER	7,5 W
		LUMINOUS FLUX	850 lm
		SIZE & SOCKET	
  	 	EFFICIENCY	113 lm/W
		VOLTAGE	100-240 V
		FREQUENCY	50/60 Hz
		CURRENT	168 mA
		POWER FACTOR	> 0,5
		COLOR RENDERING INDEX RA	> 80
		SDCM	< 6
		BEAM ANGLE	360°
		WARM UP TIME	≤ 0,5"
		SWITCHING CYCLE	45.000
		LIFETIME	25.000 h
		KELVIN	2700 K / 4000 K / 6500 K
		REF. CODE	H8.LED.R7S.CCT

R7s LED 189mm - CCT SETTABLE			
		POWER	10,5 W
		LUMINOUS FLUX	1100 lm
		SIZE & SOCKET	
  	 	EFFICIENCY	104 lm/W
		VOLTAGE	100-240 V
		FREQUENCY	50/60 Hz
		CURRENT	170 mA
		POWER FACTOR	> 0,5
		COLOR RENDERING INDEX RA	> 80
		SDCM	< 6
		BEAM ANGLE	360°
		WARM UP TIME	≤ 0,5"
		SWITCHING CYCLE	45.000
		LIFETIME	25.000 h
		KELVIN	2700 K / 4000 K / 6500 K
		REF. CODE	H9.LED.R7S.CCT



ENERGY CLASS

A++
A+
A
B
C
D
E

A+

SILICONE PROTECTION DRIVER

INDOOR & OUTDOOR USE


-30 +80 °C 90% HUMIDITY

VOLTAGE SURGE RESISTANT

TUV CB

LVD EMC ERP 6000h

IECEE CB CERTIFICATE: SG PSB-LE-01711

POWER	6 W		8 W	
LUMINOUS FLUX	800 lm		1000 lm	
SIZE & SOCKET				
EFFICIENCY	133 Lm/W		125 Lm/W	
VOLTAGE	100-240 V		100-240 V	
FREQUENCY	50/60 Hz		50/60 Hz	
CURRENT	60 mA		76 mA	
POWER FACTOR	> 0,7		> 0,7	
COLOR RENDERING INDEX RA	> 80		> 80	
SDCM	< 6		< 6	
BEAM ANGLE	360°		360°	
WARM UP TIME	≤ 0,5"		≤ 0,5"	
SWITCHING CYCLE	> 100.000		> 100.000	
LIFETIME	25.000 h		25.000 h	
KELVIN	4000K	2700 K	4000K	2700 K
REF. CODE	H.LED.FIL.4K	H.LED.FIL.3K	H2.LED.FIL.4K	H2.LED.FIL.3K
COMPARISON	6W 800 Lm = 60W incandescent SAVE 90% 8W 1000 Lm = 75W incandescent SAVE 89%			



ENERGY CLASS

A++
A+
A
B
C
D
E

A+

SILICONE PROTECTION DRIVER

INDOOR & OUTDOOR USE


-30 +80 °C 90% HUMIDITY

VOLTAGE SURGE RESISTANT

TUV CB

LVD EMC ERP 6000h

IECEE CB CERTIFICATE: SG PSB-LE-01712 SG PSB-LE-01708

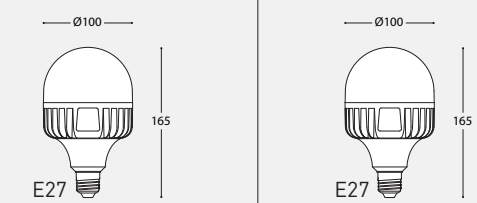POWER	15 W		30 W	
LUMINOUS FLUX	1800 lm		3500 lm	
SIZE & SOCKET				
EFFICIENCY	120 Lm/W		116 Lm/W	
VOLTAGE	100-240 V		100-240 V	
FREQUENCY	50/60 Hz		50/60 Hz	
CURRENT	130 mA		135 mA	
POWER FACTOR	> 0,5		> 0,9	
COLOR RENDERING INDEX RA	> 80		> 80	
BEAM ANGLE	200°		200°	
WARM UP TIME	< 0,5"		< 1"	
SWITCHING CYCLE	30.000		30.000	
LIFETIME	25.000 h		25.000 h	
KELVIN	4000 K	3000 K	4000 K	3000 K
REF. CODE	H3.LED.HIP.4K	H3.LED.HIP.3K	H2.LED.HIP.4K	H2.LED.HIP.3K
COMPARISON	15W 1500 Lm = 100W incandescent SAVE 85% 30W 3300 Lm = 50W HQI-SON SAVE 40%			



ENERGY CLASS

A++
A+
A
B
C
D
E

A+

SILICONE PROTECTION DRIVER

INDOOR & OUTDOOR USE


-30 +80 °C 90% HUMIDITY

VOLTAGE SURGE RESISTANT

TUV CB

LVD EMC ERP 6000h

IECEE CB CERTIFICATE: SG PSB-LE-01711

POWER	12 W	
LUMINOUS FLUX	1500 lm	
SIZE & SOCKET		
EFFICIENCY	125 Lm/W	
VOLTAGE	100-240 V	
FREQUENCY	50/60 Hz	
CURRENT	100 mA	
POWER FACTOR	> 0,7	
COLOR RENDERING INDEX RA	> 80	
SDCM	< 6	
BEAM ANGLE	360°	
WARM UP TIME	≤ 0,5"	
SWITCHING CYCLE	> 100.000	
LIFETIME	25.000 h	
KELVIN	4000K	2700K
REF. CODE	H3.LED.FIL.4K	H3.LED.FIL.3K
COMPARISON	12W 1500 Lm = 100W incandescent SAVE 88%	



ENERGY CLASS

A++
A+
A
B
C
D
E

A+

SILICONE PROTECTION DRIVER

INDOOR & OUTDOOR USE


-30 +80 °C 90% HUMIDITY

VOLTAGE SURGE RESISTANT



TUV CB

LVD EMC ERP 6000h

IECEE CB CERTIFICATE: SG PSB-LE-01707 SG PSB-LE-01705

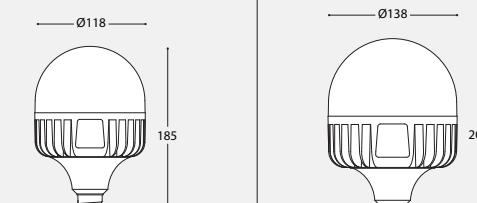
POWER	50 W		60 W	
LUMINOUS FLUX	5300 lm		7000 lm	
SIZE & SOCKET				
EFFICIENCY	106 Lm/W		116 Lm/W	
VOLTAGE	100-240 V		100-240 V	
FREQUENCY	50/60 Hz		50/60 Hz	
CURRENT	210 mA		290 mA	
POWER FACTOR	> 0,9		> 0,9	
COLOR RENDERING INDEX RA	> 80		> 80	
SDCM	< 6		< 6	
BEAM ANGLE	200°		200°	
WARM UP TIME	< 1"		< 0,5"	
SWITCHING CYCLE	30.000		30.000	
LIFETIME	25.000 h		25.000 h	
KELVIN	4000 K	3000 K	4000 K	3000 K
REF. CODE	H.LED.HIP.4K	H.LED.HIP.3K	H4.LED.HIP.4K	H4.LED.HIP.3K
COMPARISON	50W 5000 Lm = 70W HQI-SON SAVE 30% 60W 7000 Lm = 100W HQI-SON SAVE 40%			


GX53 LED Ø75 - CCT SETTABLE



POWER	3 W
LUMINOUS FLUX	350 lm
SIZE & SOCKET	NEW VERSION CCT SETTABLE LAMP Ø75 GX53 20
EFFICIENCY	116 Lm/W
VOLTAGE	100-240 V
FREQUENCY	50/60 Hz
CURRENT	30 mA
COLOR RENDERING INDEX RA	> 80
SDCM	< 6
BEAM ANGLE	120°
WARM UP TIME	0 s
SWITCHING CYCLE	> 30.000
LIFETIME	25.000 h
KELVIN SETTABLE	3000 K / 4000 K / 6500 K
REF. CODE	H.LED.G53.CCT
COMPARISON	3W 350 Lm  = SAVE 93% 40W incandescent 


GX53 LED Ø180mm



POWER	7 W		11 W		18 W	
LUMINOUS FLUX	600 lm		1300 lm		2000 lm	
SIZE & SOCKET						
EFFICIENCY	86 Lm/W		118 Lm/W		111 Lm/W	
VOLTAGE	100-240 V		100-240 V		100-240 V	
FREQUENCY	50/60 Hz		50/60 Hz		50/60 Hz	
CURRENT	60 mA		150 mA		200 mA	
POWER FACTOR	0,5		0,9		0,9	
CRI (RA)	> 80		> 80		> 80	
BEAM ANGLE	90°		90°		90°	
WARM UP TIME	≤ 0,5"		≤ 0,5"		≤ 0,5"	
SWITCHING CYCLE	30.000		> 25.000		> 25.000	
LIFETIME	25.000 h		25.000 h		25.000 h	
KELVIN	4000 K		4000 K		4000 K	
REF. CODE	H6.LED.G53.4K		H4.LED.G53		H5.LED.G53.4K	
COMPARISON	7W = 60W 800 lm incandescent  SAVE 88%		11W = 100W 1300 lm incandescent  SAVE 89%		18W = 150W 2000 lm incandescent  SAVE 88%	


GX53 LED Ø100mm - CCT SETTABLE



POWER	7 W	10 W
LUMINOUS FLUX	800 lm	1200 lm
SIZE & SOCKET		
EFFICIENCY	114 Lm/W	120 Lm/W
VOLTAGE	100-240 V	100-240 V
FREQUENCY	50/60 Hz	50/60 Hz
CURRENT	34 mA	48 mA
POWER FACTOR	0,8	0,8
COLOR RENDERING INDEX RA	> 80	> 80
SDCM	< 6	< 6
BEAM ANGLE	120°	120°
WARM UP TIME	0 s	0 s
SWITCHING CYCLE	> 30.000	> 30.000
LIFETIME	25.000 h	25.000 h
KELVIN SETTABLE	3000 K / 4000 K / 6500 K	3000 K / 4000 K / 6500 K
REF. CODE	H2.LED.G53.CCT	H3.LED.G53.CCT
COMPARISON	7W 800 lm  = 75W incandescent  SAVE 90% 10W 1200 lm  = 100W incandescent  SAVE 90%	

SOLAR MODULE - CCT SETTABLE



SIZE		40	
SUMMER MODE		LUMEN	42
		AUTONOMY	25h
WINTER MODE		LUMEN	20
		AUTONOMY	46h
SENSORE MODE		LUMEN	280
		ACTIVE TIME	25 sec
		N° Detections	423
SOLAR PANEL		5V/2W	
		Monocrystalline PET type	
		Antishock material	
CHARGING TIME		6h	
REPLACEABLE BATTERY		LiFePO4 IFR26650 3,3Ah, 3,2V	
		No Risk of explosion	
		Working temperature -10° to +60°C	
		Longer Lifetime	
PIR SENSOR		Detection angle 120°	
		Fields of detection up to 5 mt	
		Active for 25 sec.	
LED		3 CIRCUITS	SMD 3528
		COLOR RENDERING INDEX RA	> 80
		SDCM	< 6
		LIFETIME	30.000 h
		KELVIN SETTABLE	3000 K / 4000 K / 6500 K
REF. CODE		H.LED.SOL.CCT	

TO SEE OUR COMPLETE COLLECTION

Ask for our
General Catalogue 2021
or visit our website at
www.fumagalli.it




157
DISTRIBUTORS
ALL OVER THE WORLD

MADE IN ITALY


RESIN MATERIAL ADVANTAGES



NO MAINTENANCE

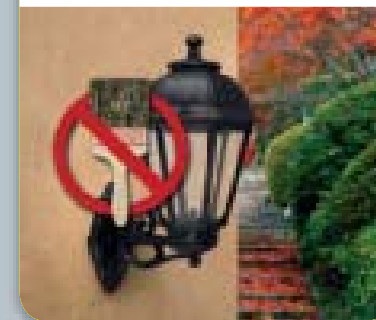

ANTI-CORROSION

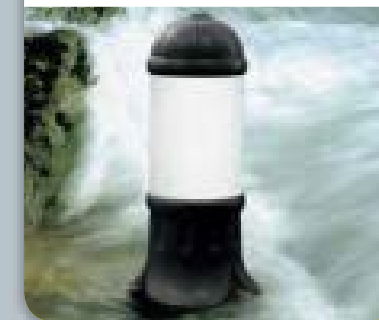

DOUBLE INSULATION



NOT AFFECTED BY
CHEMICAL FERTILIZERS




UV-RAY STABILIZED



RECYCLABLE




UV TREATED




DOUBLE
INSULATION



ANTI-SHOCK




TEMPERATURE



ENERGY SAVING



RESIDENTIAL



PUBLIC

HOW TO READ THE CODE

DIFFUSER
IDENTIFIES
THE DIFFUSER

V 50

STRUCTURE
IDENTIFIES THE
STRUCTURE ON
WHICH THE DIFFUSER
IS MOUNTED (POLE,
BRACKET, BASE, SPIKE)

3 6 1

SYSTEM
IDENTIFIES THE
MULTILIGHT
SYSTEM IF PRESENT

A 2 0

COLOUR OF THE
STRUCTURE
IDENTIFIES THE COLOUR
OF THE STRUCTURE
A BLACK
W WHITE
L GREY

A

COLOUR OF THE
DIFFUSER
IDENTIFIES THE COLOUR
OF THE DIFFUSER
X CLEAR / FROSTED
Y OPAL
Z SMOKED

X

ELECTRIFICATION
IDENTIFIES THE TYPE OF
ELECTRIFICATION AND
THE EVENTUAL
PRESENCE OF BULBS

H 1 L



Fumagalli S.r.l.
Via Ca' Bassa, 29
21100 Varese - ITALY
Tel. +39.0332.336353
Fax. +39.0332.336358
E-mail italian.lux@fumagalli.it



www.fumagalli.it