
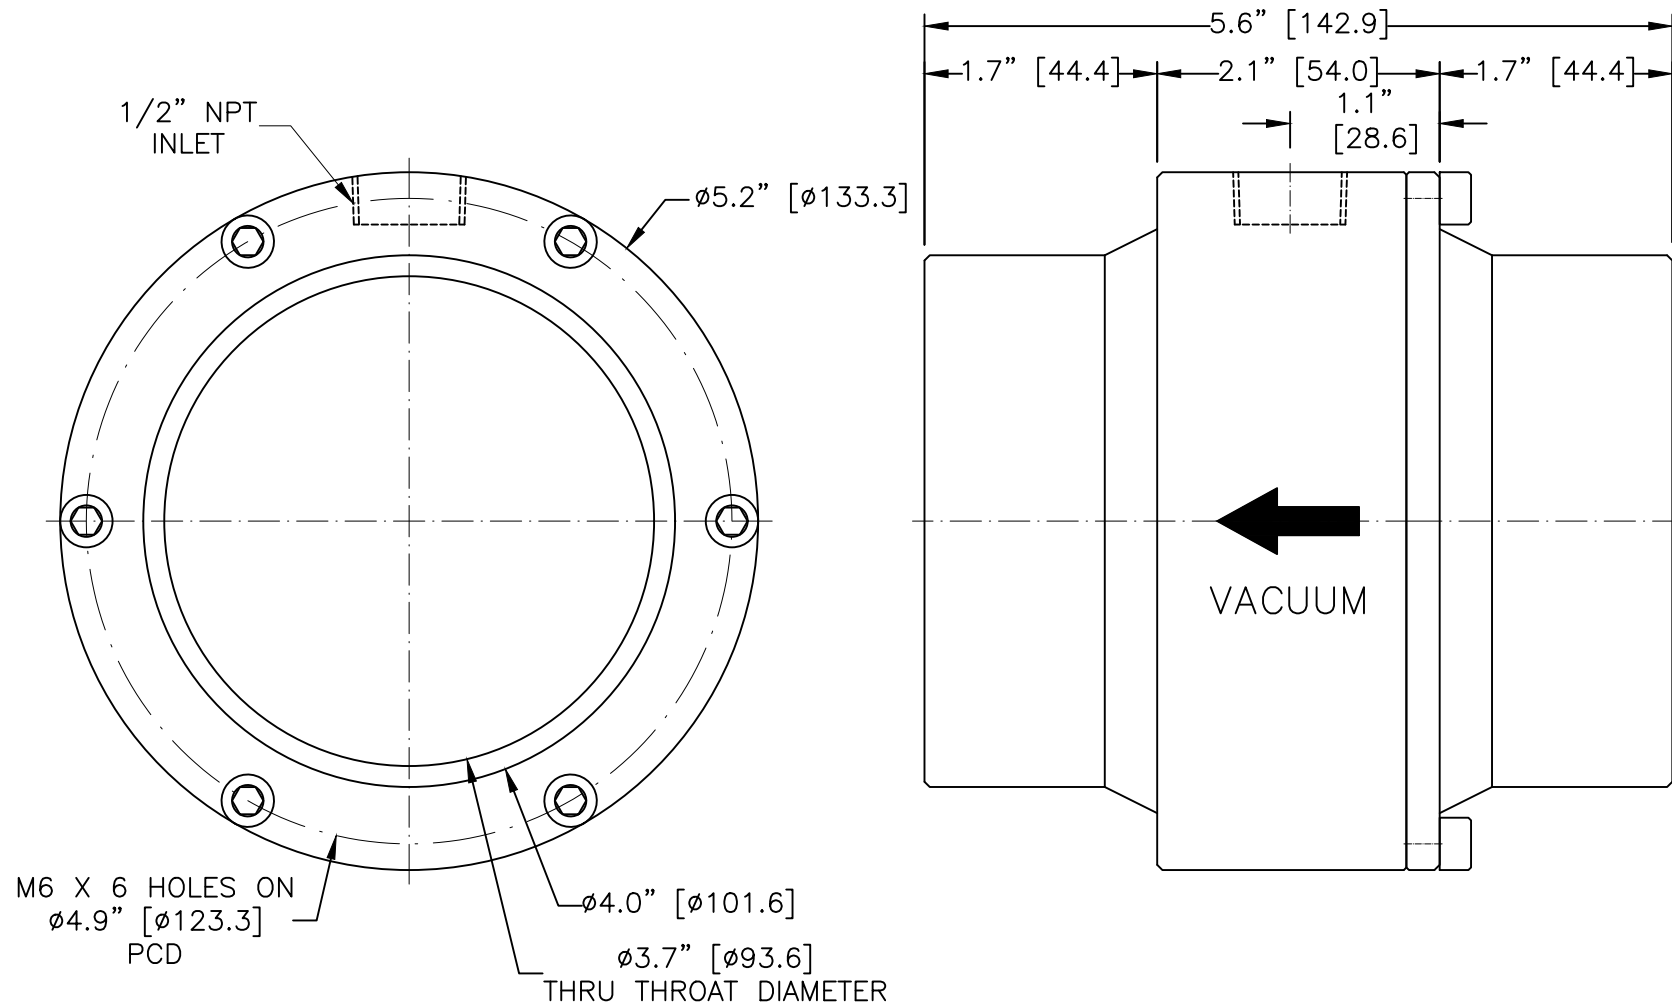


4" SS-316L RV OUTLINE



PROPRIETARY
REPRODUCTION OR DISTRIBUTION
WITHOUT WRITTEN CONSENT OF
NEXFLOW™ IS PROHIBITED.

THIRD ANGLE PROJECTION		REQUIREMENTS—UNLESS OTHERWISE SPECIFIED		CONTRACT NUMBER —		NEX FLOW AIR PRODUCTS CORP. 10520 YONGE STREET, UNIT 358-220, RICHMOND HILL, ON L4C 3C7 TEL: (416) 410-1313 & FAX: (416) 410-1806 www.nex-flow.com						
		GENERAL		CLIENT —								
MATERIAL	SS-316L	1. DIMS ARE IN INCHES (MM).		CONTRACTOR —		DRAWN	DATE	TITLE 4" SS-316L RING VAC OUTLINE				
		2. DIMENSIONING AND TOLERANCING IN ACCORDANCE WITH ANSI Y14.5 (1982)				CHIRAG.S	10/03/2018					
		3. MACHINE FINISH 125 MICRO INCH RMS				DESIGN —	CHECKED					
		4. INTERNAL RADI .015" (0.4)				ASHISH	Q.A.					
		5. BREAK SHARP CORNERS 0.005" (0.1) TO 0.015" (0.4)				PROJECT —						
FINISH	BUFFING	LIMITS				STRESS —	MANUFACTURING —	SIZE	CAGE CODE	PART NO	RELEASE	REV
		1. LINEAR DIMS.				—	—	C	—	30007S-316L-OL	P	1
		.XXX = .005" (0.1)				—	—	—	—	—	—	—
		.XX = .010" (0.3)				—	—	—	—	—	—	—
		.X = .030" (0.8)				—	—	—	—	—	—	—
		2. ANGLES = ± 1/2°				—	—	—	—	—	—	—
		3. RUNOUT .010 TIR				—	—	—	—	—	—	—
		4. HOLES IN ACCORDANCE WITH AND 10387				—	—	—	—	—	—	—
						MECHANISM	ELECTRICAL	SCALE	1:1	DWG NO	SHEET	1 OF 1