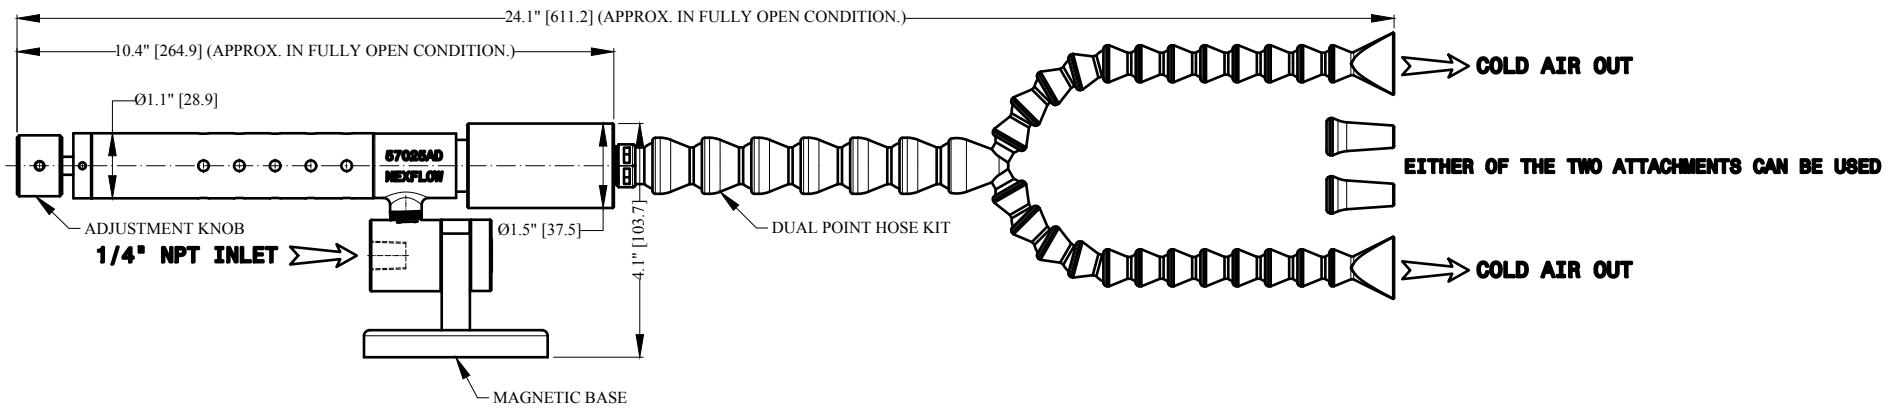

PROPRIETARY
REPRODUCTION OR DISTRIBUTION
WITHOUT WRITTEN CONSENT OF
NEXFLOW™ IS PROHIBITED.

THIRD ANGLE PROJECTION

MATERIAL –

FINISH –

NEXT ASSEMBLY	USED ON	QTY PER ASSY	PART NO
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
–	–	–	–
PART NO			

REQUIREMENTS–UNLESS OTHERWISE SPECIFIED

GENERAL

1. DIMS ARE IN INCHES (MM)
2. DIMENSIONING AND TOLERANCING IN ACCORDANCE WITH ANSI Y14.5 (1982)
3. MACHINE FINISH 3.175 MICRONS RMS
4. INTERNAL RADII .3
5. BREAK SHARP CORNERS .1 TO .3

LIMITS

1. LINEAR DIMS. .XXX = ±.1 .XX = ±.3 .X = ±.5
2. ANGLES = ± 1/2°
3. RUNOUT .2 TIR
4. HOLES IN ACCORDANCE WITH ANS 10387

CONTRACT NUMBER –
CLIENT –
CONTRACTOR –

DRAWN	CHIRAG.S
DATE	19/07/2019
DESIGN	–
CHECKED	APS
PROJECT	–
Q.A.	–
STRESS	–
MANUFACTURING	–
THERMAL	–
MATERIALS	–
MECHANISM	–
ELECTRICAL	–

NEX FLOW AIR PRODUCTS CORP.
10520 YONGE STREET, UNIT 35B–220, RICHMOND HILL, ON L4C 3C7
TEL.: (416) 410–1313 & FAX: (416) 410–1806 www.nex–flow.com

TITLE: ADJUSTABLE SPOT COOLER WITH DUAL POINT HOSE KIT

SIZE	CAGE CODE	PART NAME	RELEASE	REV
–	–	OUTLINE	–	–

SCALE 1:1 | CAD NO 57025AD | SHEET 1 OF 1