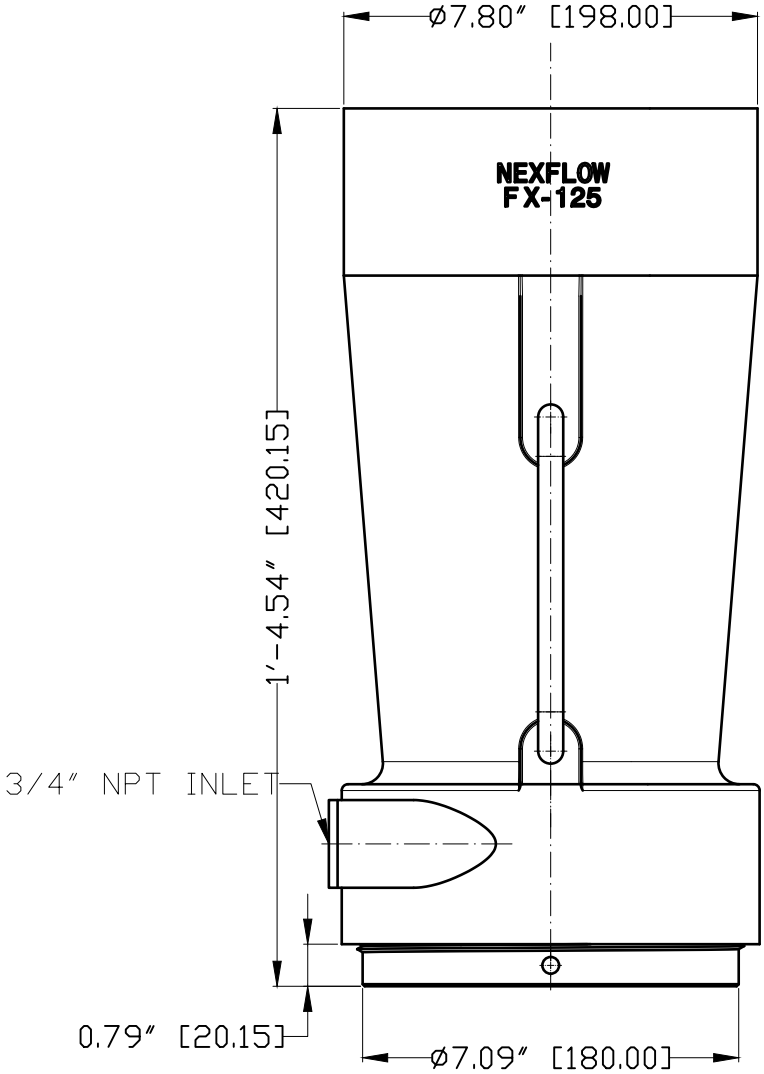

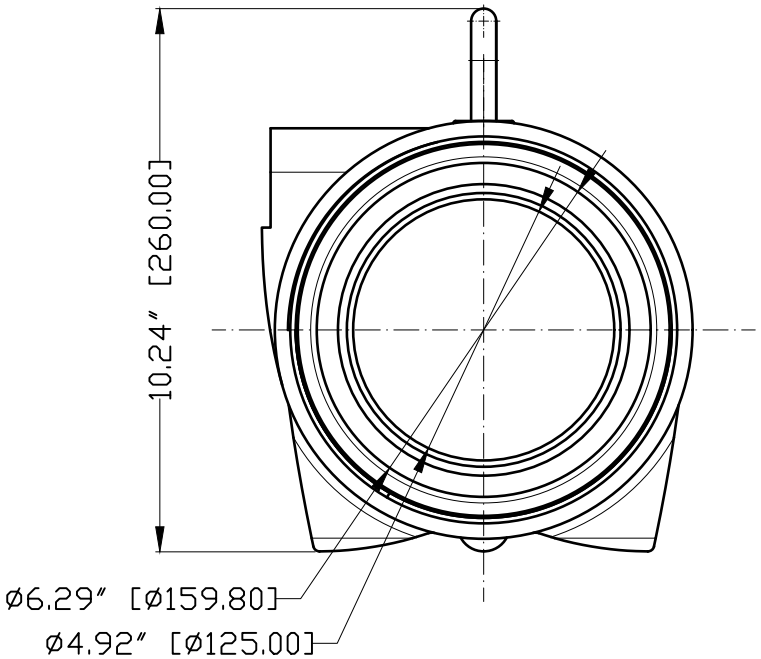

THIRD ANGLE PROJECTION

MATERIAL
CAST ALUMINIUM ALLOY

FINISH

NEXT ASSEMBLY	USED ON	QTY PER ASSY	PART NO
PART NO			

REQUIREMENTS—UNLESS OTHERWISE SPECIFIED

GENERAL

1. DIMS ARE IN INCHES [MM]
2. DIMENSIONING AND TOLERANCING IN ACCORDANCE WITH ANSI Y14.5 (1982)
3. MACHINE FINISH 3.175 MICRONS RMS
4. INTERNAL RADII .4
5. BREAK SHARP CORNERS .1 TO .4

LIMITS

1. LINEAR DIMS.
   .XXX = ±
   .XX = ±
   .X = ±
2. ANGLES = ± 1/2°
3. RUNOUT .010 TIR
4. HOLES IN ACCORDANCE WITH AND 10387

CONTRACT NUMBER	–
CLIENT	–
CONTRACTOR	–
DRAWN	CHIRAG.S
DATE	13/12/2018
DESIGN	–
CHECKED	ASHISH
PROJECT	–
Q.A.	–
STRESS	–
MANUFACTURING	–
THERMAL	–
MATERIALS	–
MECHANISM	–
ELECTRICAL	–

NEX FLOW AIR PRODUCTS CORP.
10520 YONGE STREET, UNIT 35B-220, RICHMOND HILL, ON L4C 3C7
TEL.: (416) 410-1313 & FAX: (416) 410-1806 www.nex-flow.com

TITLE
OUTLINE DRAWING OF
FX125 FIXED X-STREAM™ AIR AMPLIFIER

SIZE	CAGE CODE	DWG NO	RELEASE	REV
C	–	FX125	P	–

SCALE	CAD NO	SHEET
1:1	FX125	1 OF 1