









# **X-BOX**- LED 4 4x320W 48V LED - 9M

Our engineers know that the market needs a lighting tower that is rugged, long lasting and safe. The X-BOX LED has been created beginning from these characteristics. It is the best solution to your needs and guarantees 5000 sqm of illuminated area. 20 units can be loaded on a standard truck. To all of this, we added the technology that allows for maximum fuel efficiency and reliability.











220(I) - 0,55(I/h)



1030Kg

5000 sqm



- Multi-directionally adjustable and tiltable floodlights
- 7 sections hydraulic vertical tower 8,5 m, 340° rotatable
- Standard light sensor for machine power on and off
- Galvanized metalworks
- 80 µm powder coating
- Very compact dimensions for easy handling & transportability, up to 22 units per truck
- Central lifting eye longitudinal and transversal forklift pockets for effective handling
- Plug & play, colour coded cables and connectors
- Guided main coiled cable to avoid damage during tower operation
- Control panel alarms for engine proteciton and fuel level indicator
- Circuit breaker for electrical protection against overload
- External emergency stop button
- Fully bunded tank, 110%
- Certified wind stability up tp 110 km/h
- 4 extendable & height adjustable stabilizers
- On board levels for guidance during stabilization

## **APPLICATIONS**



Special events



Rural & hard to reach areas



Emergency response



Construction & work sites



Gas, oil & mining operations



Military applications






Ease of transport and handling



22 **Units Per Truck** 



You can place 22 units on a single vehicle thanks to one of the compactest footprints on the market.

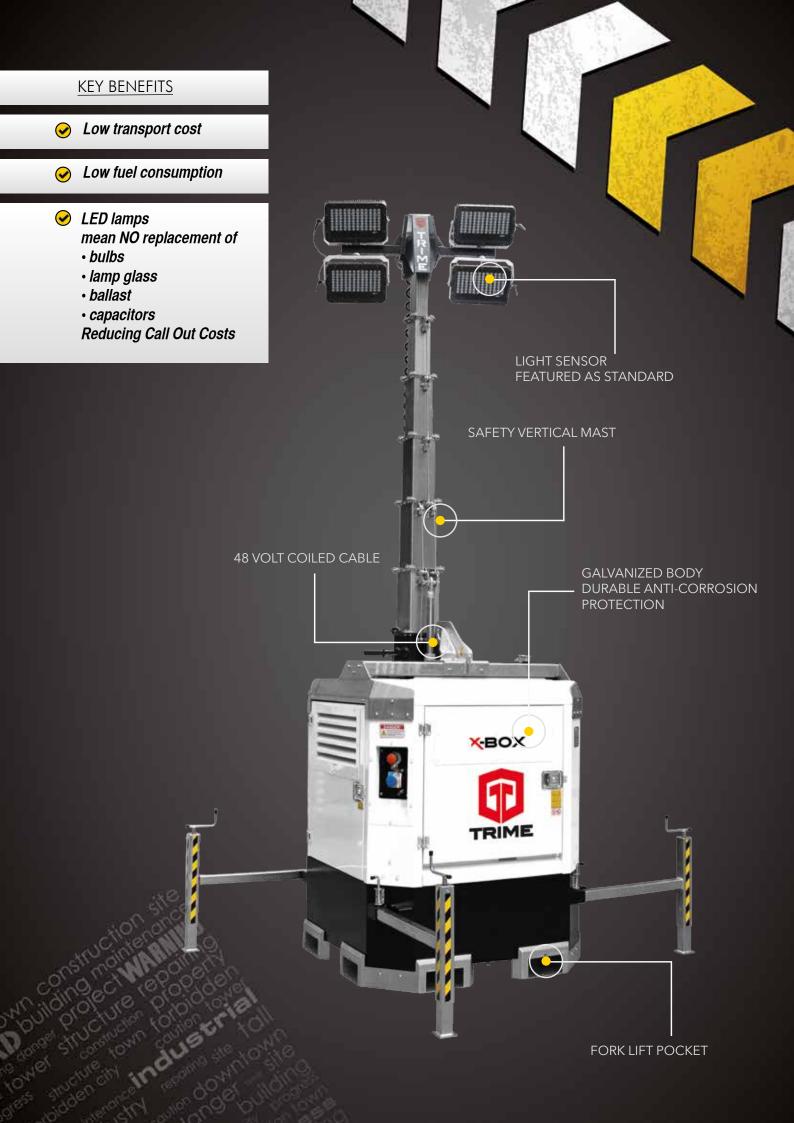

#### technical data


Dimensions & weight

Difficusions & weight	
Dimensions min. (mm)	1200x1200x2560
Dimensions max. (mm)	2520x2520x8500
Total weight without fuel	1030 Kg
Features	
1 Catal C3	
Rotation	340°
Floodlights	4x320W
Lamps	LED
Options	Timer
Alternator	
Model	Synchronous
Frequency (Hz)	50
Insulation class	Н

Engine	
Model	Kubota Z482
Fuel	Diesel
r.p.m	1500
Tank capacity (I)	220
Consumption (I/h)	0,55
Running time (h)	400
Noise level (dBA) at 7m	65

#### Standard load delivery

### 22 sets



1 kVA Units Per Truck

#### Illuminated area


Degree of protection


Single phase voltage
Auxiliary outlets

#### 5000 sqm

IP23

3,5 kVA - 230V

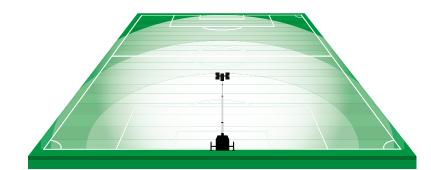



# **ЛЕГИОН-ТЕХНО** профессионализм - дело техники

# Эксклюзивный официальный дистрибьютор TRIME на территории России и СНГ

+7 (495) 532-37-34 | +7 (925) 741-89-01

8 (800) 222-51-05 (Бесплатно для всех регионов) www.legion-tehno.ru | trime@legion-tehno.ru