



FABRICANTES DE
MOLINOS DE CAFÉ

MANUFACTURERS
OF COFFEE GRINDERS

Molino de café profesional
para todo tipo de cafés

Professional coffee grinder
for all types of coffee.

ICONIC TRON™ 45dB"

ABS

COLLECTION SILENCER



GRINDING ONLY 5°
ABOVE ROOM TEMPERATURE

TECHNICAL CHARACTERISTICS 0-500gr/5' Max 3Kg

VOLTAGE: 230V / 220V / 110V

FREQUENCY: 50Hz / 60Hz

PHASES: 1 (monophasic)

RPM: 1.300 / 1.600

CURRENT: 1,5A / 3,9A

CAPACITOR: 14µf / 40µf

POWER: 0,25Hp / 356W

PROTECTION RATING: IP21

MOTOR SUPPLIED WITH THERMAL PROTECTOR

MAXIMUM OPERATING TIME: 30 min

TEMPERED STEEL GRINDING WHEELS (62HRC) ø 65mm

LIFESPAN OF GRINDING WHEELS: 500 Kg

HOPPER CAPACITY: 1 Kg

MULTI-LANGUAGE TOUCH SCREEN

SELECTION FOR 1 OR 2 FRESHLY GROUND COFFEES OR CONTINUOUS GRINDING

TOTAL OR PARTIAL COFFEE COUNTER

ASSISTANT TIMER GRINDING POINT

DIMENSIONS WIDTH X LENGTH X HEIGHT: 285X405X626mm



WEIGHT: 12 Kg

AIR NOISE: 45dB

Diseñado bajo directiva 89/392 CE.



Grinding blades in tempered steel
(62HRC) ø 65mm.

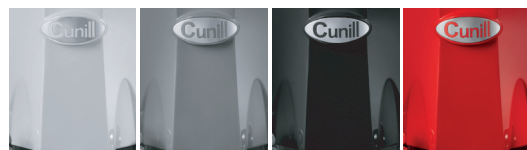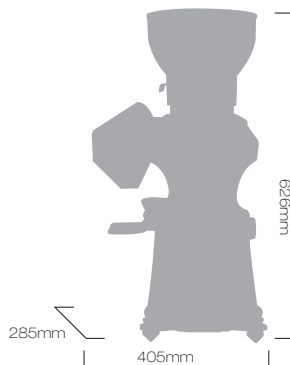

WHITE

GREY

BLACK

RED



MAIN ATTRIBUTES

Hopper (1kg) made of unbreakable and non-deformable material (co.polyester), with fast lock system and self-levelling when off the coffee grinder, with the possibility of cleaning in a dishwasher at 90 °C. - Micrometric regulation of the coffee grind using a regulatory pawl. - New expulsion system for the ground coffee (always leaving the grinding cavity clean when the coffee grinder stops). - Touch screen for easy programming and use (Language selection – Setting the grinding program for each dose – Selection of 1 dose, 2 doses or continuous grinding – Coffee counter: total or partial consumption). – Universal coffee tamper (rotatable) ABS body, two halves specially designed for ventilation and anti-vibration of the body with 7 floating points using pneumatic rings. - Motor set with anti-vibration system and central separator from the motor zone. - Silent 356W motor internally self-ventilated, 45db - Hardened steel grinding blades (62/65 HRC) of 65mm diameter.

Optional: - Personalization System with chrome plate on the back of the body and into the funnel. – Admits hopper of 2 kg. Titanium-coated burrs (62/63 HRC) 65mm diameter, 2.000 kg. – Red speed coated burrs (62/63 HRC) 65mm diameter, 3.000 kg.

