




stublina diplomat

Univerzalni zatvarač vrata / Universal door closer / Универсальный доводчик

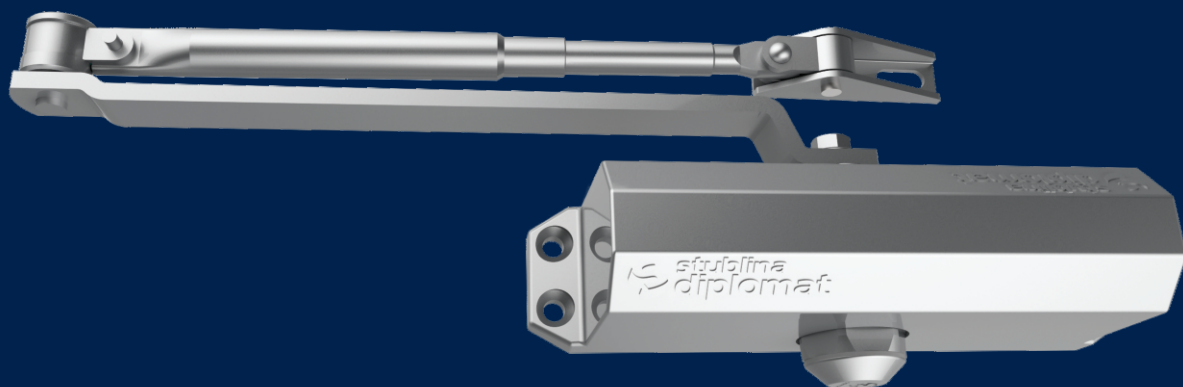

siva
silver
серый

bela
white
белый

crna
black
черный

6020.00	6040.00
6030.00	6050.00

TEHNIČKI PODACI

1. Univerzalna primena za leva i desna vrata.
2. Mogućnost podešavanja ugla otvaranja vrata do 180°.
3. Telo: aluminijumska legura livena pod pritiskom.
4. Glavni delovi (klip, zupčanik, opruga) od visokokvalitatnog čelika.
5. Podešavanje brzine zatvaranja preko regulacionih vijaka.
6. Za određivanje položaja za normalnu i obrnutu montažu potrebno je koristiti preporuke iz priloženog uputstva.

TEHNICAL FEATURES

1. Universal application for the right and the left doors.
2. Possibility to adjust the door opening angle up to 180°.
3. The body: die-cast aluminium alloy.
4. Main parts (piston, gear, spring) made of high quality steel.
5. Adjustment of the closing speed by regulating screws.
6. For the assessment of the position for normal and reverse assembling it is necessary to use the recommendations from the attached instruction.

ТЕХНИЧЕСКИЕ ДАННЫЕ

1. Универсальное применение для левой и правой двери.
2. Возможность регулировки угла открытия двери 180°.
3. Корпус: силумин-литый под давлением.
4. Основные части (поршень, шестерни, пружина) из высококачественной стали.
5. Отрегулируйте скорость закрытия винтами регулировки.
6. Для определения положения для прямого и обратного монтажа необходимо использовать рекомендации от прилагаемых инструкций.

Veličina zatvarača Door closer size Размер доводчика	Širina vrata Door width Ширина двери	Masa vrata Door mass Масса двери	Momenat zatvaranja Closing torque (0° - 4°) Момент закрытия		Mere za ugradnju Fitting dimensions Инструкция по установке						Ugao otvaranja Door opening angle Угол открывания			
											120°		180°	
					a	b	c	d	e	f	A	B	A	B
	mm	kg	Nm min.	Nm max.	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
6020.00	800	40	13	18	165	180	17	90	64	41	230	40	200	40
6030.00	1000	60	18	26	165	180	17	90	64	41	230	40	200	40
6040.00	1200	80	26	37	210	225	19	100	72	47	260	50	220	50
6050.00	1350	100	37	54	210	225	19	100	72	47	260	50	220	50

